

Detectors for a Linear Collider

Joachim Mnich

DESY


Annecy, July 4th, 2008

- **The International Linear Collider (ILC)**
 - Status of the project
 - Physics motivation
 - Impact on detector design
 - The detector concepts
- **Detector R&D for key components**
 - Vertex detectors
 - Tracking
 - Calorimetry
 - Towards larger prototypes
- **Conclusions & Outlook**




The International Linear Collider

- **Electron-positron collider**
 - centre-of-mass energy up to 1 TeV centre-of-mass energy
 - luminosities $> 10^{34}/\text{cm}^2/\text{s}$
- **The next large High Energy Physics project (after the LHC)**
- **Designed in a global effort**
- **Accelerator technology: supra-conducting RF cavities**
- **Elements of a linear collider:**

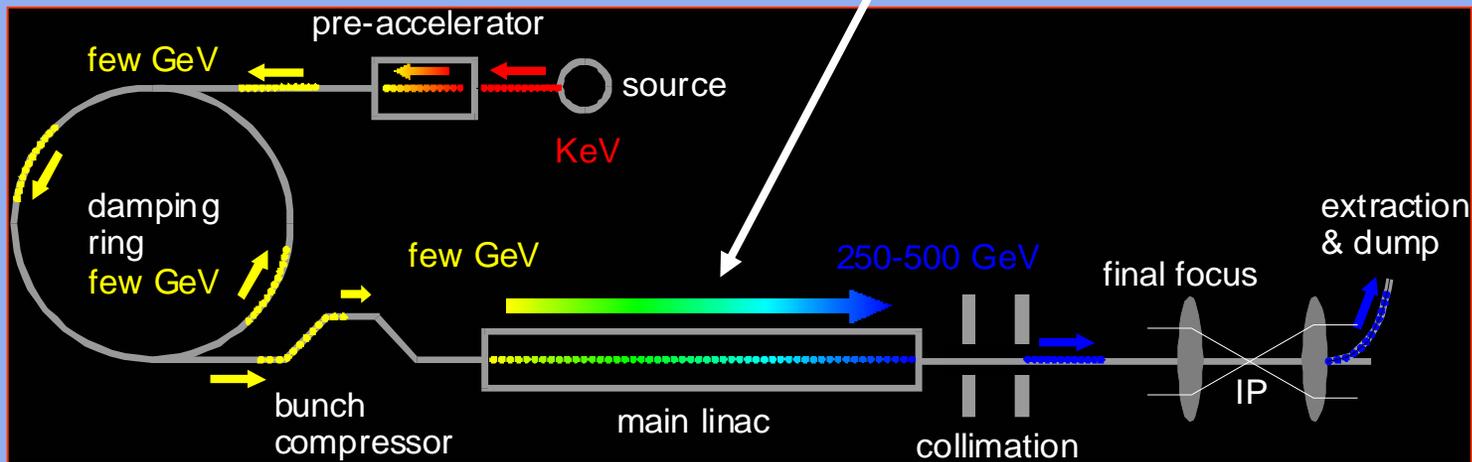


The International Linear Collider

- **International organisation:**
 - **Global Design Effort (GDE)**, started in 2005
 - **Chair: Barry Barish**
representatives from Americas, Asia and Europe
all major laboratories and many people contributing

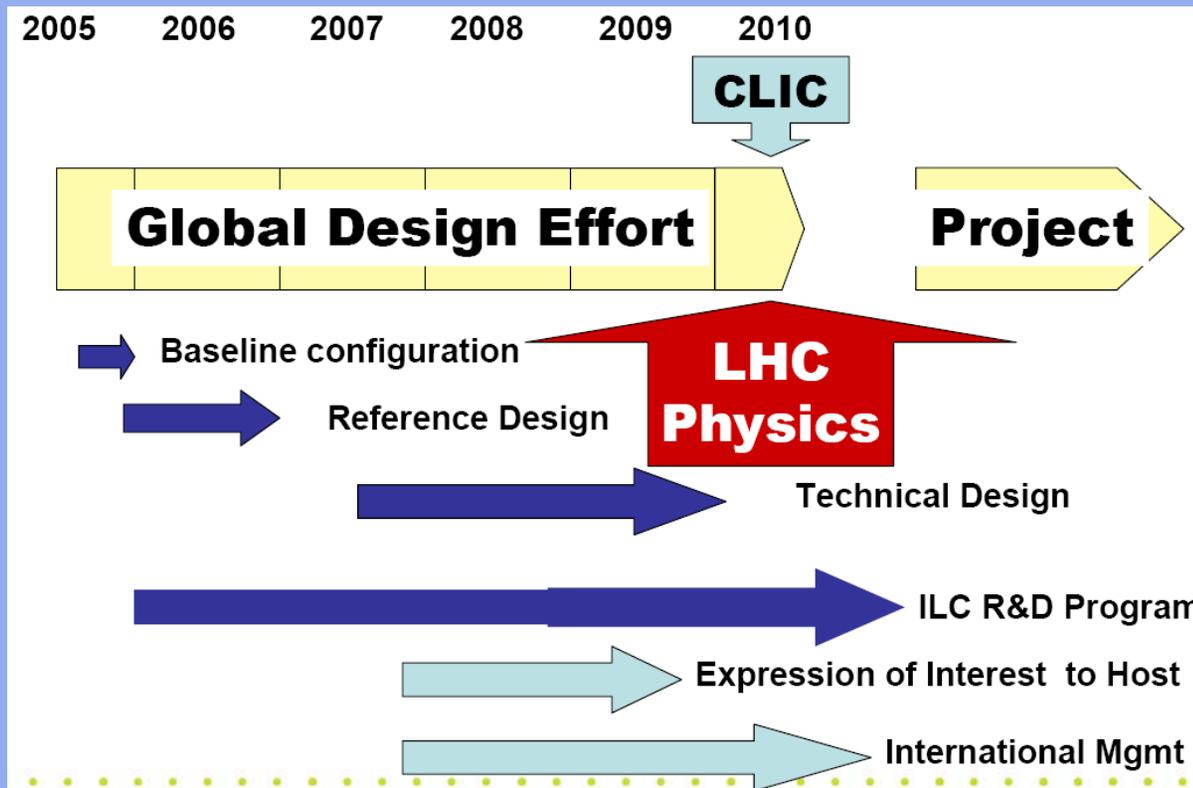

The International Linear Collider


- 2006: **Baseline Configuration Document**
- 2007: **Reference Design Report**
- **Layout of the machine:**

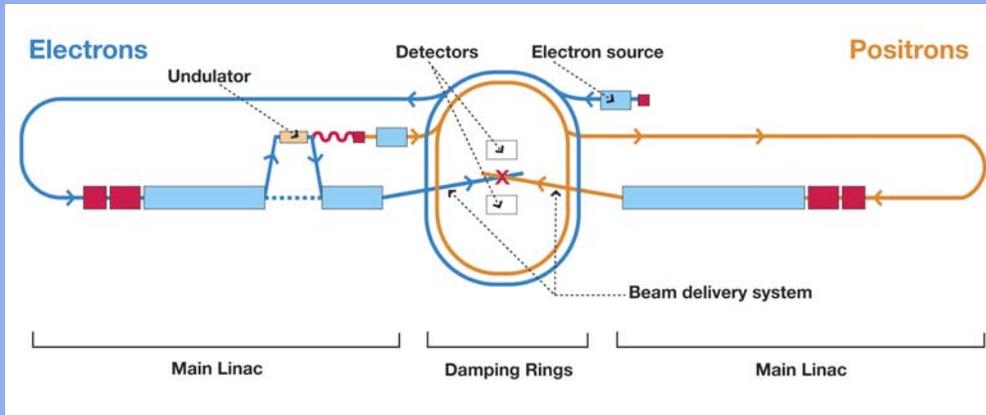

- **$2 \times 250 \text{ GeV}$**
upgradable to **$2 \times 500 \text{ GeV}$**
- **1 interaction region**
- **2 detectors (push-pull)**
- **14 mrad crossing angle**

- **Cost estimate:**
4.87 G\$ shared components
+ 1.78 G\$ site-dependent
= 6.65 G\$ (= 5.52 G€)

+ 13000 person years

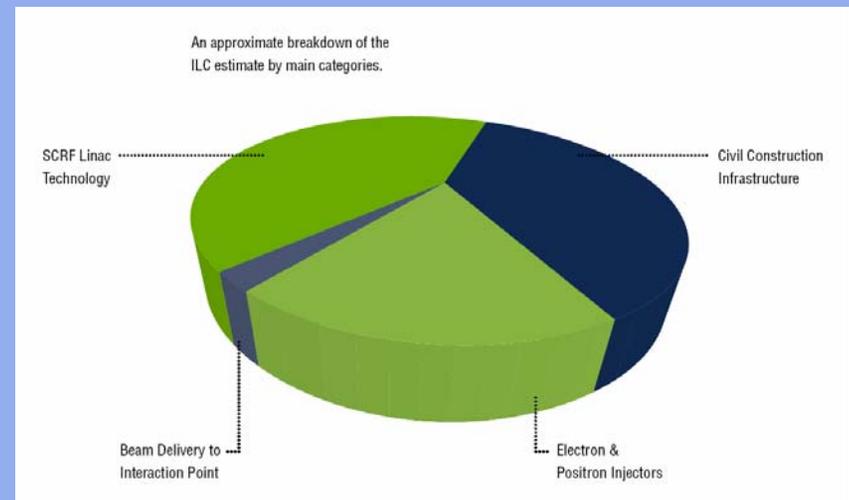

- **Next milestones:**
 - **two stage Technical Design Phase (TDP I & II)**
as proposed by GDE


- **TDP I until 2010:**
 - **concentrate on main technical and cost risks**
main linac, gradient, electron cloud, conventional facilities
be prepared when LHC results justify the programme
 - **detectors: LOIs by March 2009**
update physics performance

- **TDP II until 2012:**
 - **complete technical design**
siting plan or process
 - **detectors: react to LHC results**
complete technical designs


- ILC will complement LHC discoveries by precision measurements
- Here just two examples:

1) There is a Higgs, observed at the LHC

- e^+e^- experiments can detect Higgs bosons without assumption on decay properties
- Higgs-Strahlungs process (à la LEP)

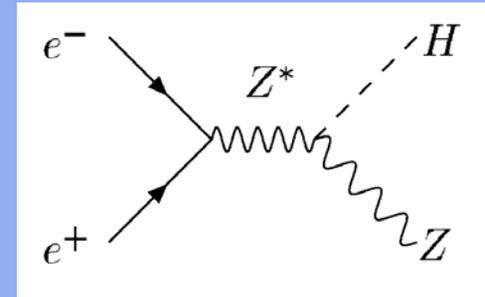


- identify Higgs events in $e^+e^- \rightarrow ZH$ from $Z \rightarrow \mu\mu$ decay
- count Higgs decay products to measure Higgs BRs
- and hence (Yukawa)-couplings

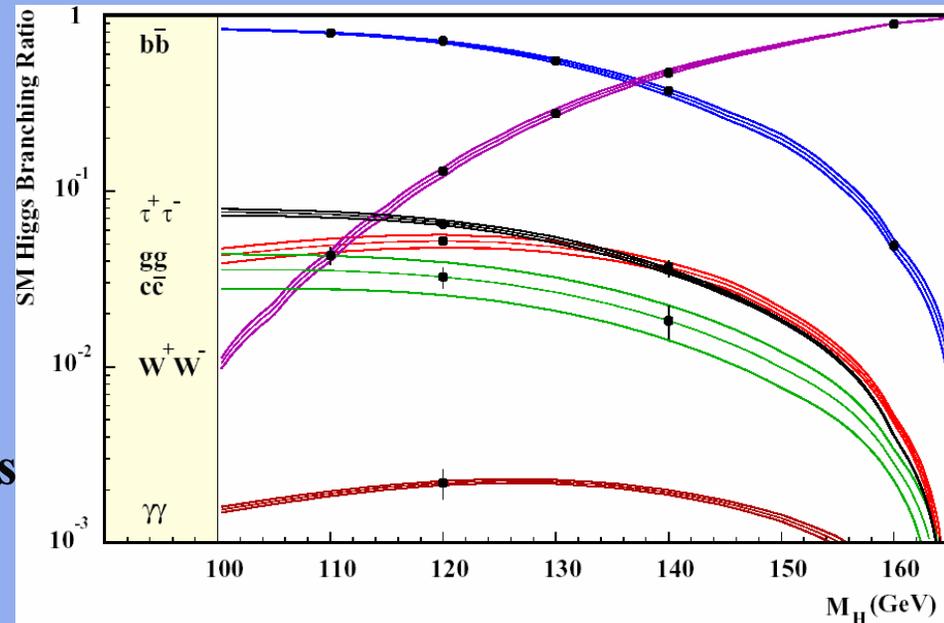


- Measure Higgs self-couplings
 $e^+e^- \rightarrow ZHH$ to establish Higgs potential

Note: small signal above large QCD background

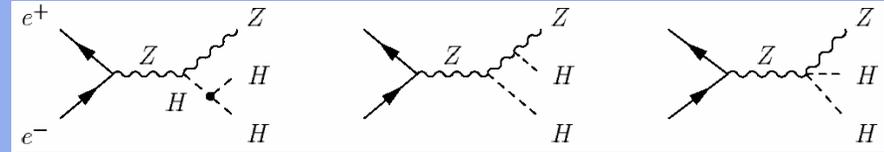

2) There is NO Higgs (definite answer from LHC!)

- something else must prevent e.g. WW scattering from violating unitarity at $O(1 \text{ TeV})$
 strong electroweak symmetry breaking?
 \rightarrow study $e^+ e^- \rightarrow WW\nu\nu$, $Wze\nu$ and $ZZee$ events

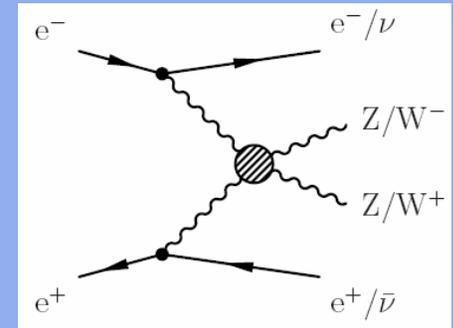

- need to select and distinguish W and Z bosons in their hadronic decays!

$$\text{BR}(W/Z \rightarrow \text{hadrons}) = 68\% / 70\%$$

- Many other physics cases: SM, SUSY, new phenomena, ...

Need ultimate detector performance to meet the ILC physics case

- Vertex detector:

e.g. distinguish c- from b-quarks

- goal impact parameter resolution

$$\sigma_{r\phi} \approx \sigma_z \approx 5 \oplus 10/(p \sin\Theta^{3/2}) \quad \mu\text{m}$$

3 times better than SLD

- small $O(20 \times 20 \mu\text{m}^2)$, low mass pixel detectors, various technologies under study

- Tracking:


- superb momentum resolution to select clean Higgs samples
- ideally limited only by Γ_Z

$$\rightarrow \Delta(1/p_T) = 5 \cdot 10^{-5} / \text{GeV} \quad (\text{whole tracking system})$$

3 times better than CMS



Options considered:

- Large silicon trackers (à la ATLAS/CMS)
- Time Projection Chamber with $\approx 100 \mu\text{m}$ point resolution (complemented by Si-strip devices)

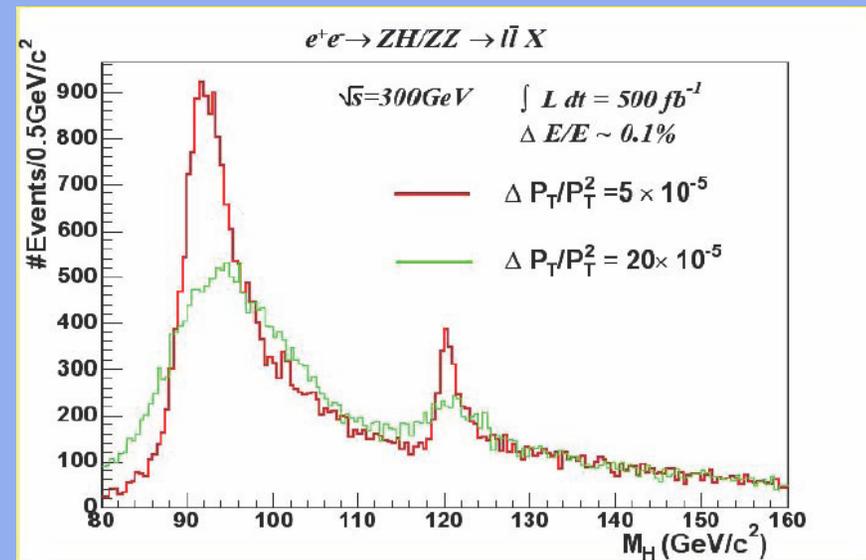



Impact on Detector Design

- Calorimeter:**
 distinguish W- and Z-bosons
 in their hadronic decays
 → $30\%/\sqrt{E}$ jet resolution!




2 times better than ZEUS

- WW/ZZ → 4 jets:**

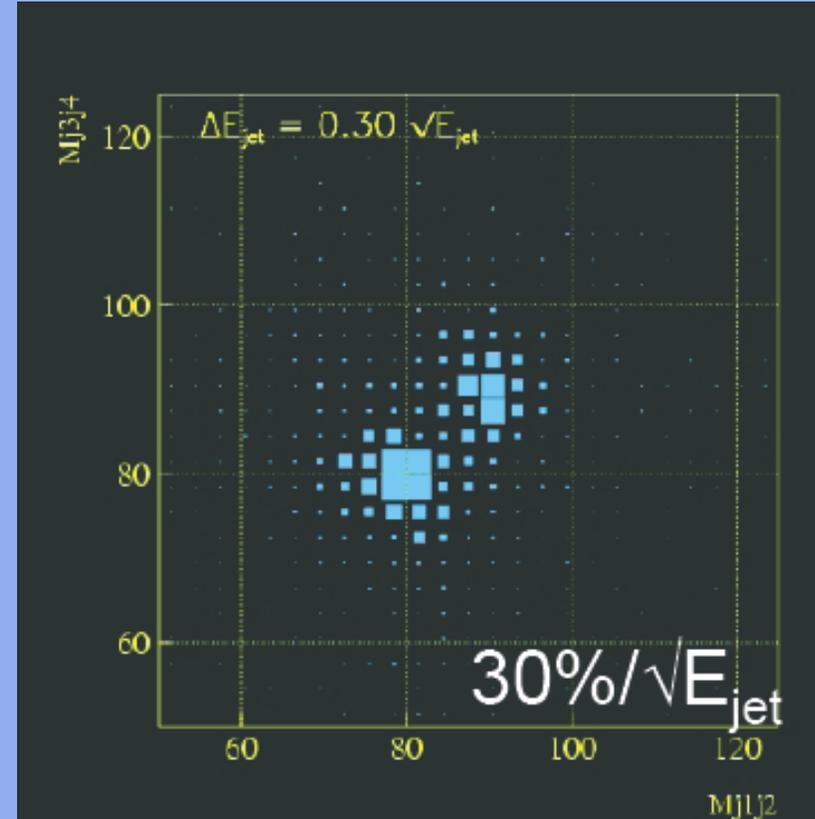
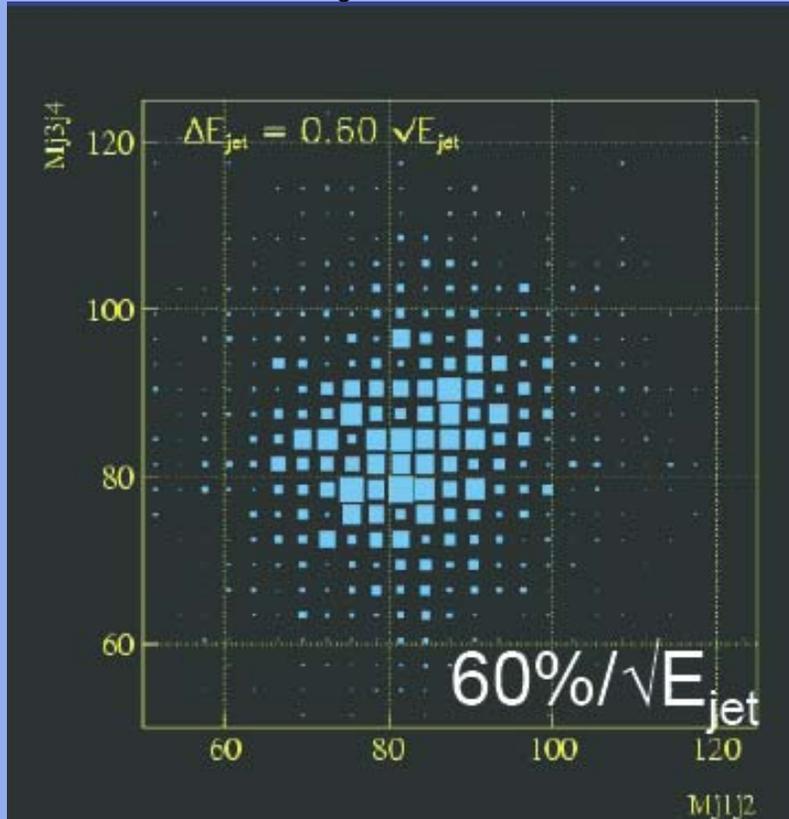


→ Particle Flow or Dual Readout calorimeter

- **Bunch timing:**
 - 5 trains per second
 - 2820 bunches per train separated by 307 ns
 - no trigger
 - power pulsing
 - readout speed
- 14 mrad crossing angle
- **Background:**
 - small bunches
 - create beamstrahlung
 - pairs

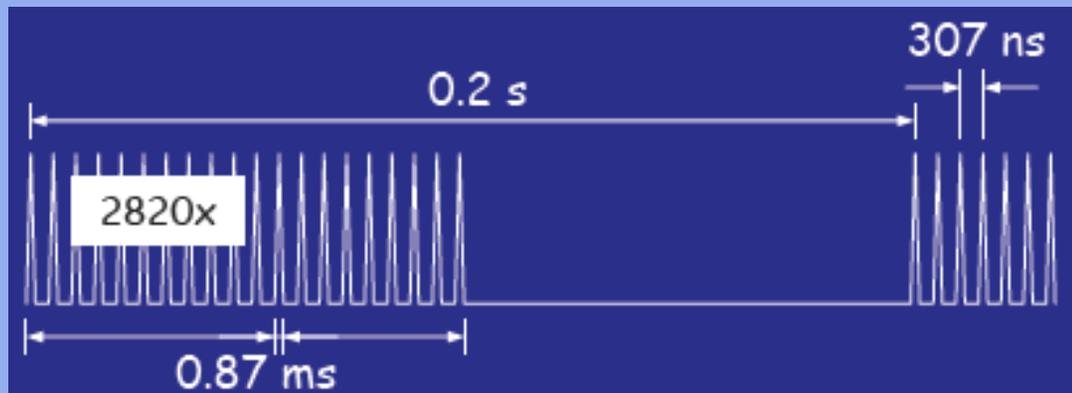


**background not as severe as at LHC
but much more relevant than at LEP**

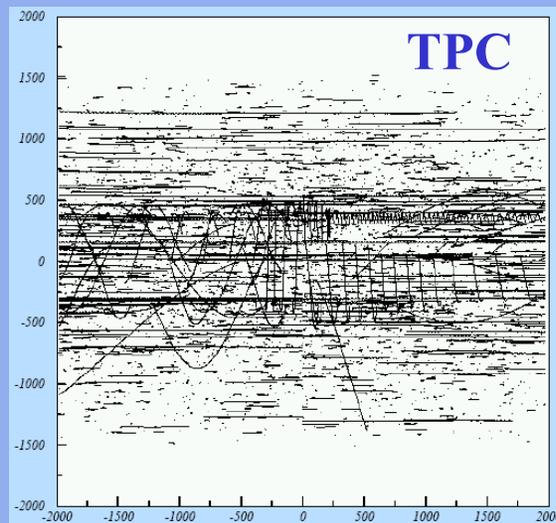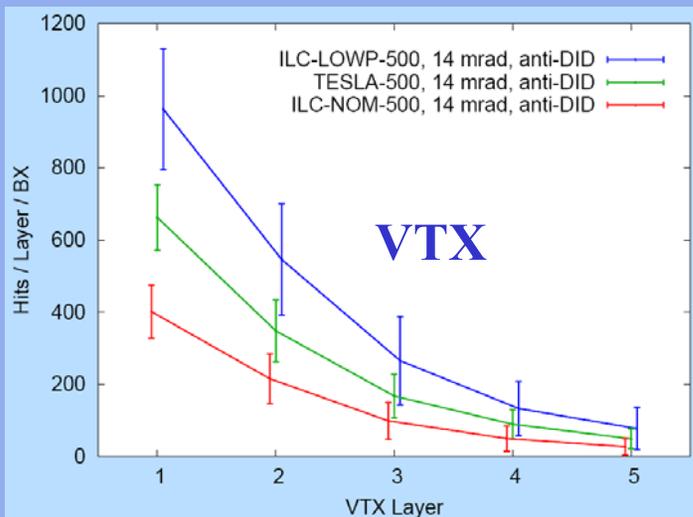


Detector Concepts

- Four detector concepts are being investigated
 - GLD (Global Large Detector)
 - LDC (Large Detector Concept)
 - SiD (Silicon Detector)
 - 4th concept
- Merging into one concept:**
(ILD) International Large Detector
- **Summer 2006: Detector Outline Documents (DOD)**
evolving documents, detailed description
 - **Summer 2007: Reference Design Reports (RDR)**
comprehensive detector descriptions,
along with machine RDR
 - Prepared by international study groups

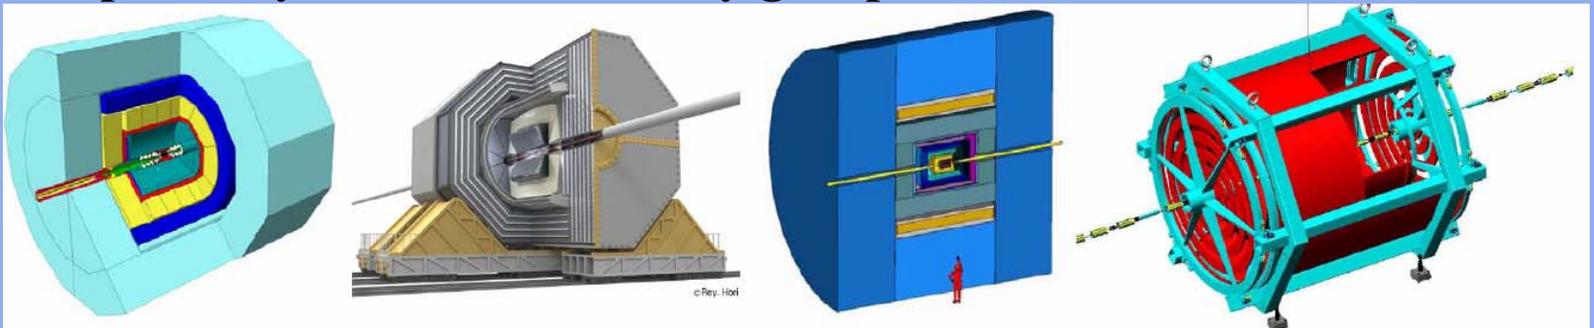




Detector Concepts

- **GLD**
 - TPC tracking
large radius
 - particle flow calorimeter
 - 3 Tesla solenoid
 - scint. fibre μ detector

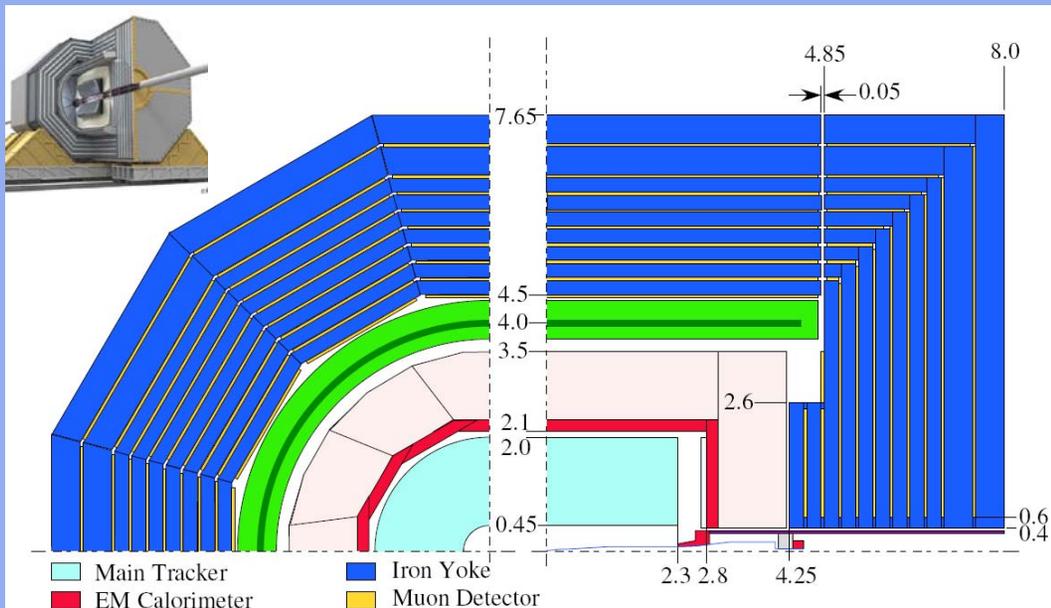


Both concepts are rather similar now merging into one (ILD)

- **LDC**
 - TPC tracking
smaller radius
 - particle flow calorimeter
 - 4 Tesla solenoid
 - μ detection: RPC or others

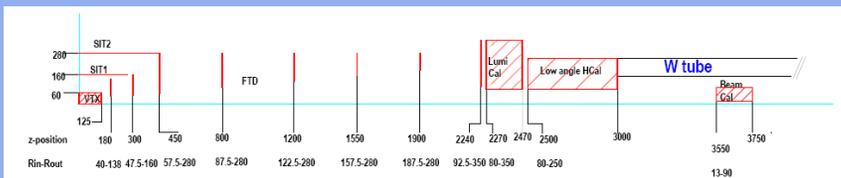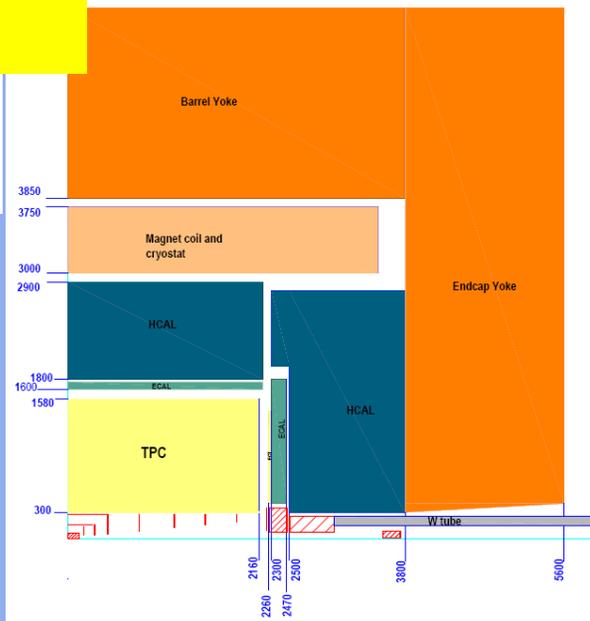


Detector Concepts


- **SiD**
 - silicon tracking
 - smaller radius
 - high field solenoid (5 Tesla)
 - scint. fibre / RPC μ detector

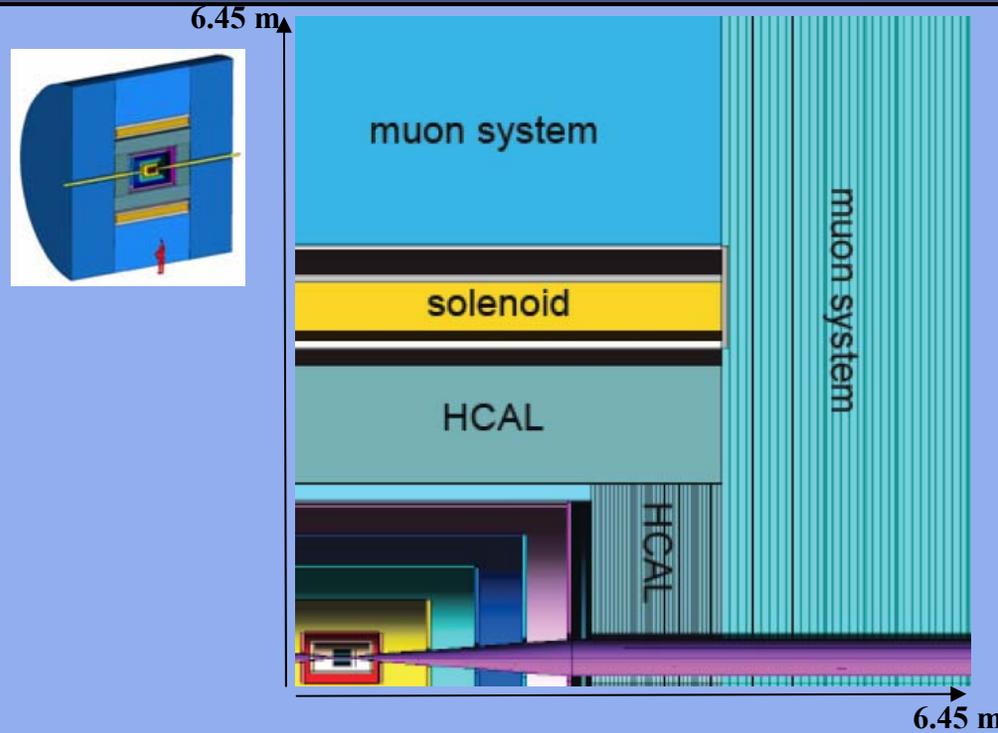

- **Silicon tracker**

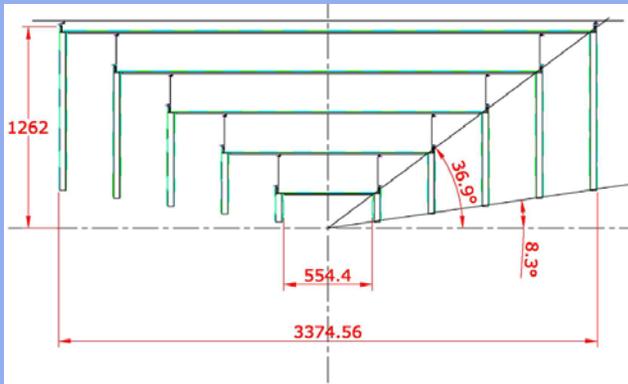




- **Magnet**
 - high field
 - but smaller volume

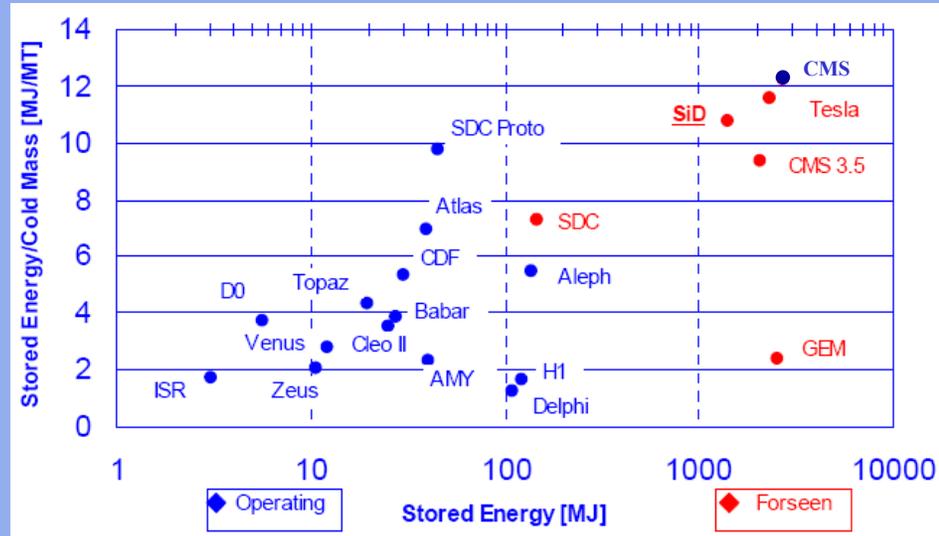

Detector Concepts

- 4th concept
 - TPC
 - multiple readout calorimeter
 - iron-free magnet, dual solenoid
 - muon spectrometer (drift tubes)

- Dual solenoid
 - iron return yoke replaced by second barrel coil and endcap coils

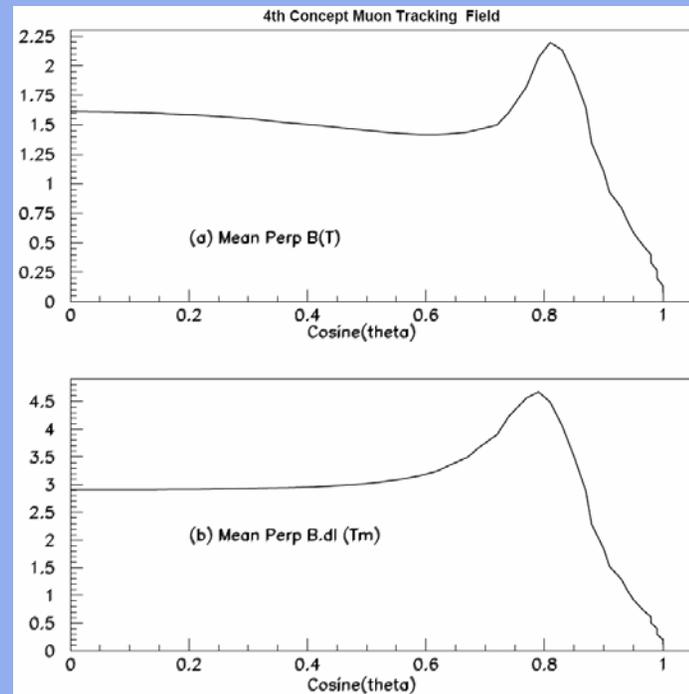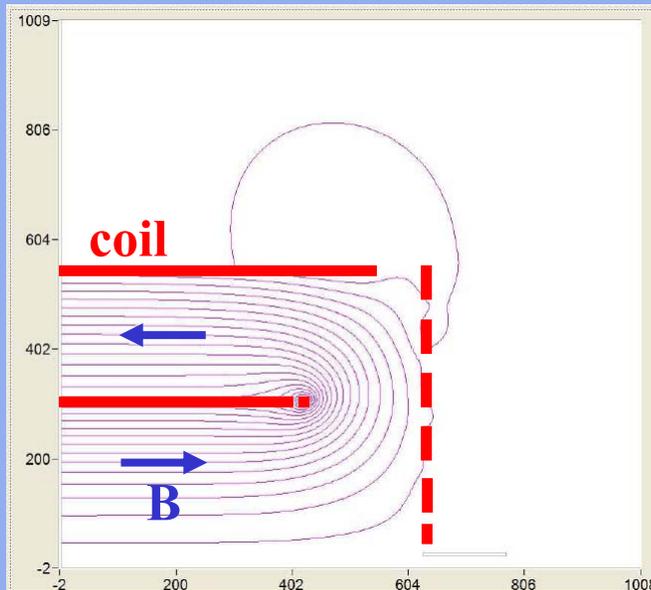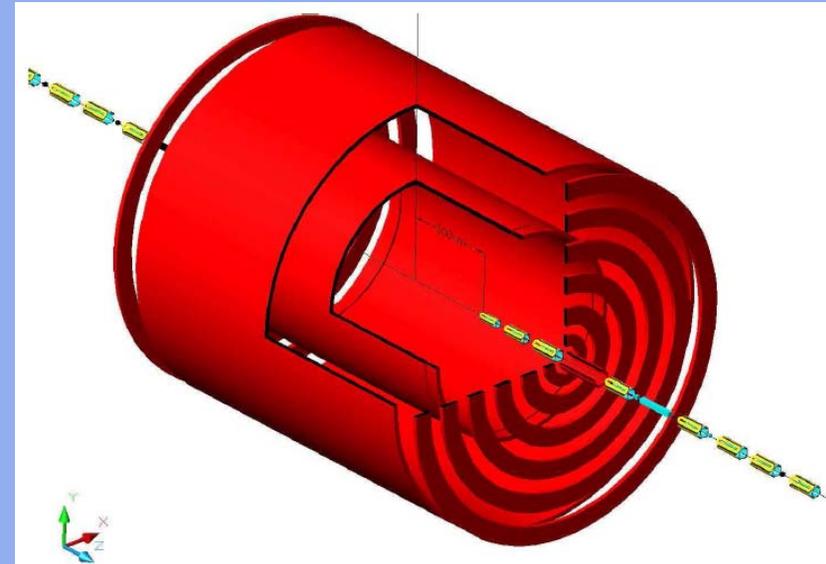

Average field seen by μ :

$$\langle B \rangle \approx 1.5 \text{ T}$$

$$\langle B l \rangle \approx 3 \text{ Tm}$$

Detector Concept and R&D efforts

- R&D efforts for key detector elements
- Overlap with detector concepts:

	GLD	LDC	SID	4th concept	Detector R&D collaborations
Vertex	X	X	X	X	<u>LCFI</u>
Tracking					
- TPC	X	X		X	<u>LCTPC</u>
- Silicon	*	*	X	*	<u>SILC</u>
Calorimetry:					
- Particle Flow	X	X	X		<u>CALICE</u>
- Multiple Readout				X	
- Forward region	X	X	X	X	<u>FCAL</u>




* silicon forward and auxiliary tracking also relevant for other concepts

Vertex Detector

- **Key issues:**
 - measure impact parameter for each track
 - space point resolution $< 5 \mu\text{m}$
 - smallest possible inner radius $r_i \approx 15 \text{ mm}$
 - transparency: $\approx 0.1\% X_0$ per layer
= $100 \mu\text{m}$ of silicon
 - stand alone tracking capability
 - full coverage $|\cos \Theta| < 0.98$
 - modest power consumption $< 100 \text{ W}$

- **Five layers of pixel detectors plus forward disks**
 - pixel size $O(20 \times 20 \mu\text{m}^2)$
 - 10^9 channels

- **Note: wrt. LHC pixel detectors**
 - $1/5 r_i$
 - $1/30$ pixel size
 - $1/30$ thickness

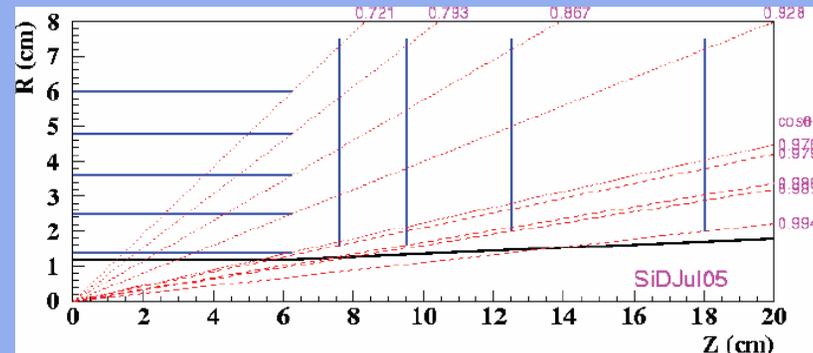
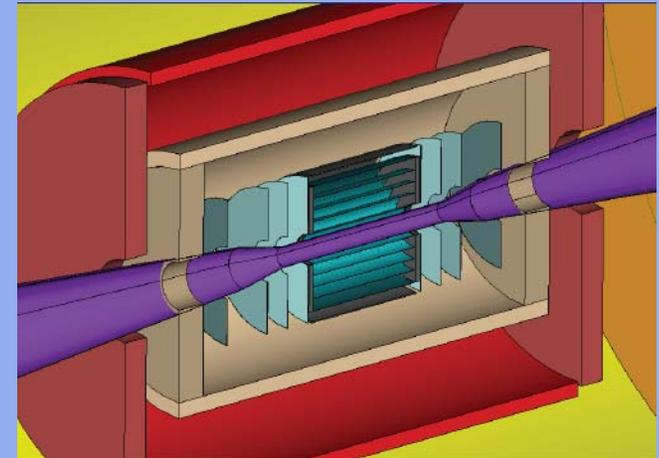
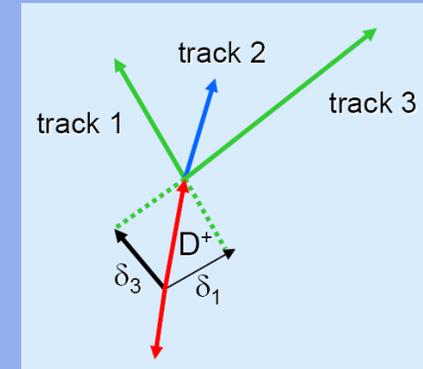


- **Critical issue is readout speed:**
- **Inner layer can afford $O(1)$ hit per mm^2 (pattern recognition)**
 - **once per bunch = 300 ns per frame too fast**
 - **once per train ≈ 100 hits/ mm^2 too slow**
 - **20 times per train ≈ 5 hits/ mm^2 might work**
- **50 μs per frame of 10^9 pixels!**
- **readout during bunch train (20 times)**
or store data on chip and readout in between trains
e.g. ISIS: In-situ Storage Image Sensor
- **Many different (sensor)-technologies under study**
CPCCD, MAPS, DEPFET, CAPS/FAPS, SOI/3-D,
SCCD, FPCCD, Chronopixel, ISIS, ...
 → **Linear Collider Flavour Identification (LCFI) R&D collaboration**
- **Below a few examples**
- **Note: many R&D issues independent of Si-technology**
(mechanics, cooling, ...)

- **CCD**
 - create signal in 20 μm active layer
 - etching of bulk material to keep total thickness $\leq 60 \mu\text{m}$
 - low power consumption
 - but very slow


→ apply column parallel (CP) readout

- **Second generation CP CCD** designed to reach 50 MHz operation

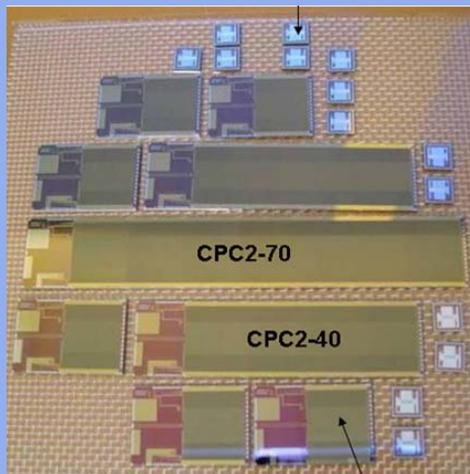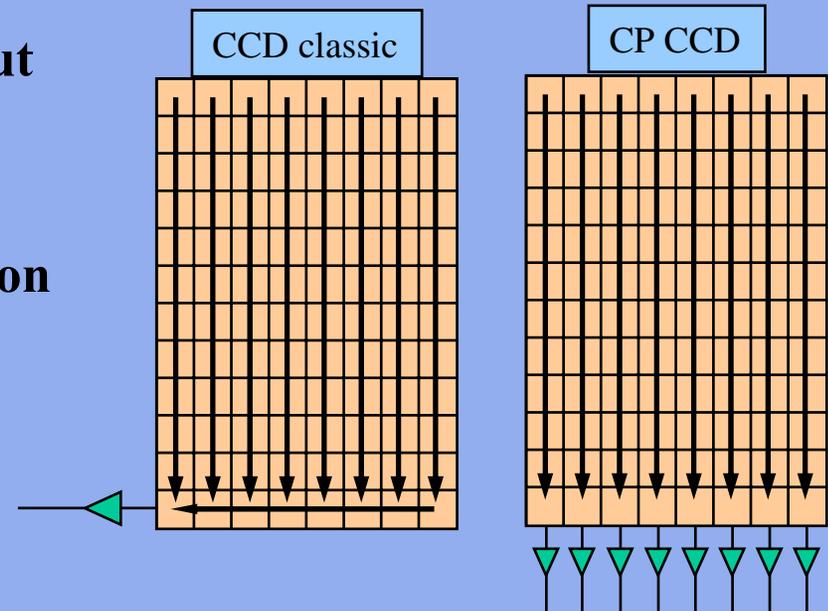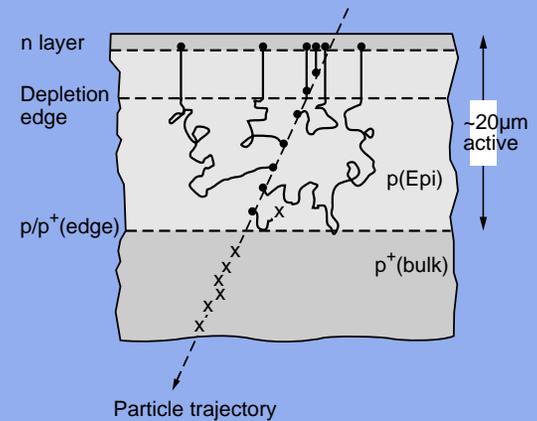


- CMOS Monolithic Active Pixel detectors

- standard CMOS wafer integrating all functions
 - no bonding between sensor and electronics
 - e.g. Mimosa chip

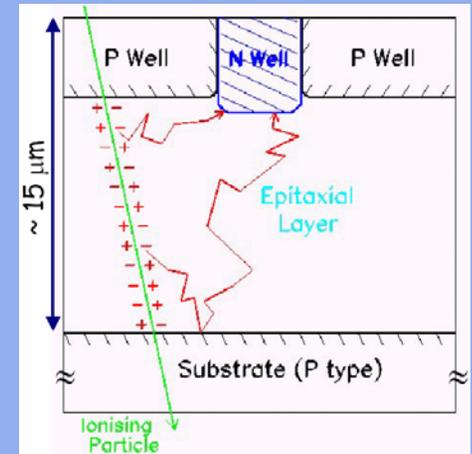

- DEPFET: DEPLETED Field Effect Transistor

- fully depleted sensor with integrated pre-amplifier
 - low power and low noise


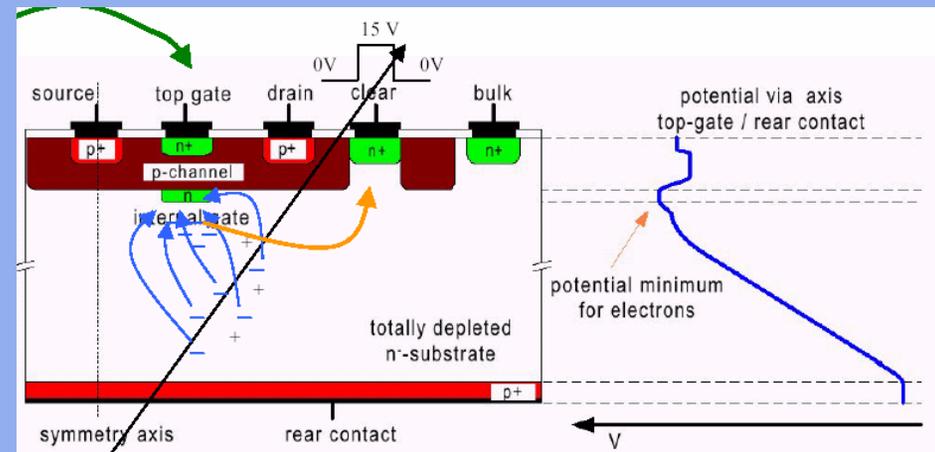


- **Mechanical support structure**
goal $0.1\% X_0$ per layer
- **Example:**
 - **Reticulated Vitreous Carbon (RVC)**
 - **or Silicon Carbide SiC foams**
 - both good thermal match to Si

1.5 mm RVC foam + $2 \times 25 \mu\text{m}$ silicon
= $0.09\% X_0$

1.5 mm SiC foam + $25 \mu\text{m}$ silicon
= $0.16\% X_0$ (reducible, less dense foam)
achieved




- **can be adopted to all detector technologies**

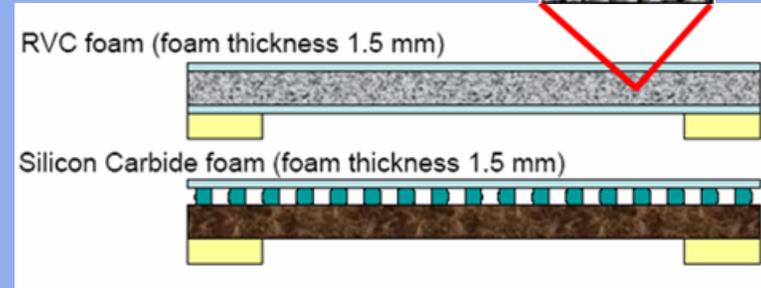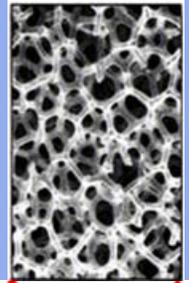

- **The SiD tracker:**
 - 5 barrel layers
 - $r_i = 20$ cm
 - $r_o = 125$ cm
 - 10 cm segmentation in z
short sensors
 - measure phi only

- **endcap disks**
 - 5 double disk per side
 - measure r and phi

- **critical issue:**
 - material budget
 - (support, cooling, readout)
 - goal: 0.8% X_0 per layer

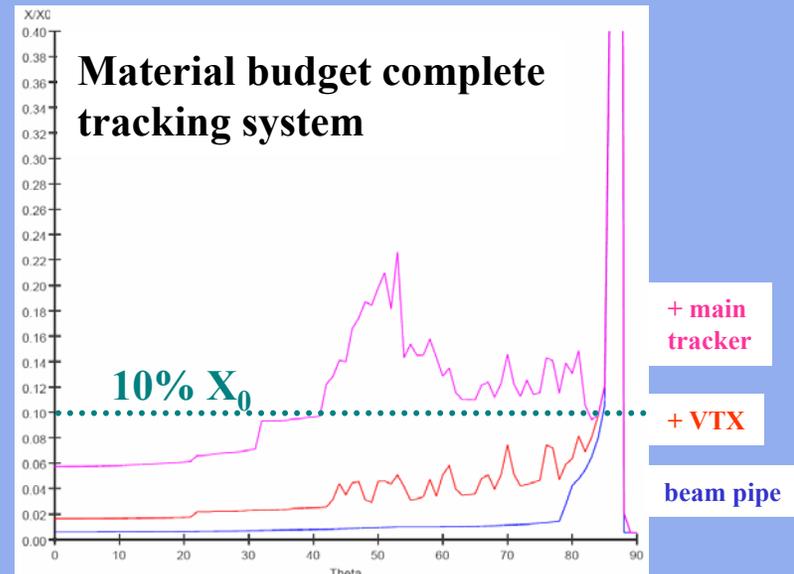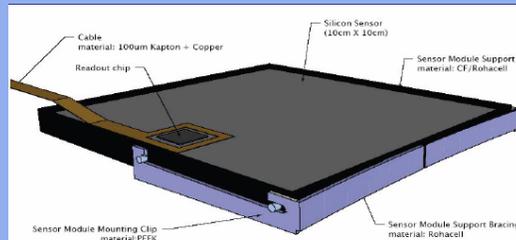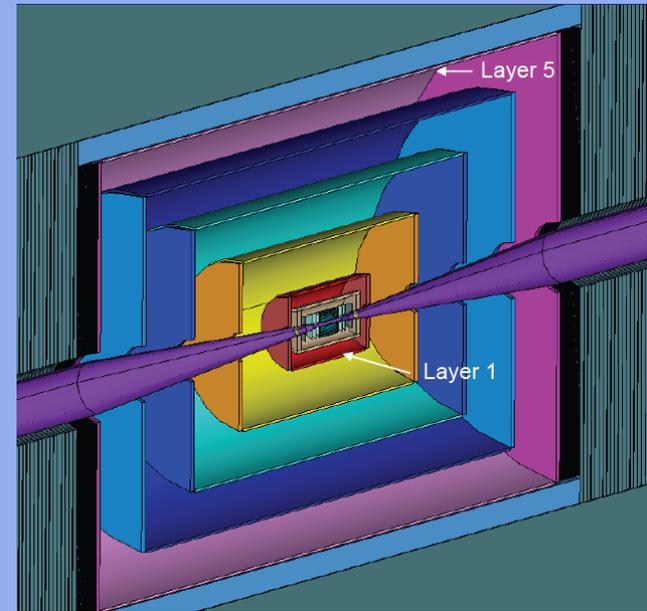


Silicon Tracking

- **Alternative design: long ladder**
 - Silicon tracking for the Linear Collider (SiLC) collaboration
 - for all-silicon tracker or silicon envelope (\rightarrow TPC)

- **Development of low noise electronics**
 - amplification & pulse shaping
 - passive cooling
 - exploit low duty cycle



Prototype modules:

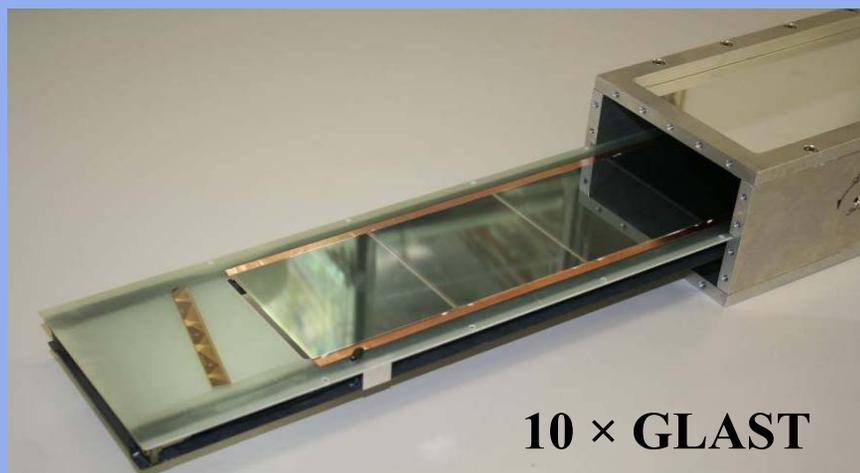

- **GLD, LDC and 4th:**
high resolution TPC as main tracker
 - 3 – 4 m diameter
 - ≈ 4.5 m length
 - low mass field cage
 - $3\% X_0$ barrel
 - $< 30\% X_0$ endcap
 - ≈ 200 points/track
 - $\approx 100 \mu\text{m}$ single point res.
 $\rightarrow \Delta(1/p_T) = 10^{-4} / \text{GeV}$
 (10 times better than LEP!)





- **Complemented by Forward Tracking**
 - endcap between TPC and ECAL
 - Si strip, straw tube, GEM-based, ...
 are considered

- TPC development performed in
LCTPC collaboration

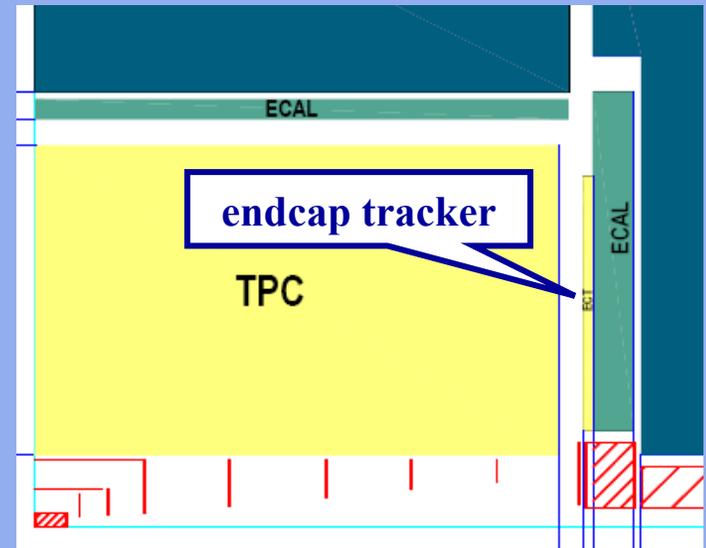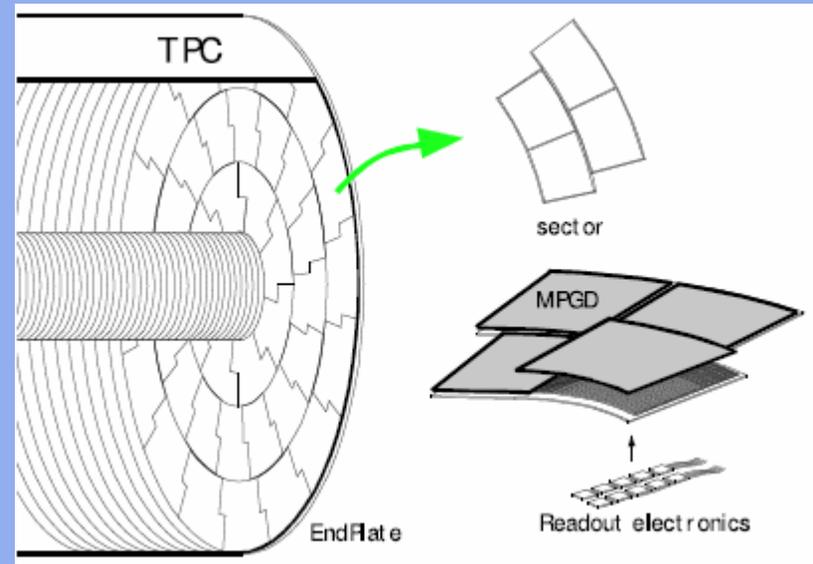

Time Projection Chamber

- New concept for gas amplification at end flanges:
 - Replace proportional wires by Micro Pattern Gas Detectors (MPGD)
- GEM or MicroMegas
 - finer dimensions
 - two-dimensional symmetry
 - no $E \times B$ effects
 - only fast electron signal
 - intrinsic suppression of ion backdrift

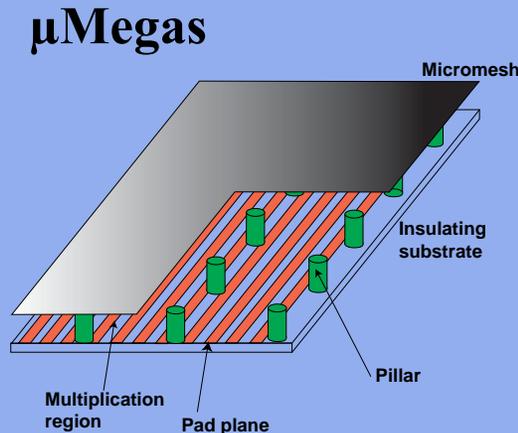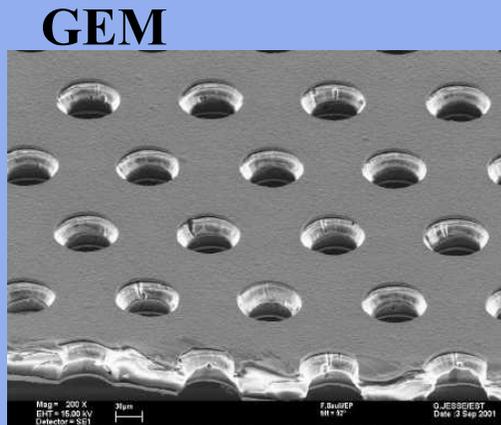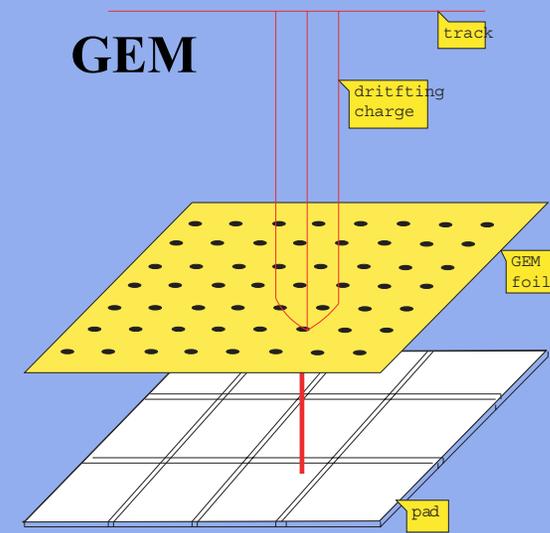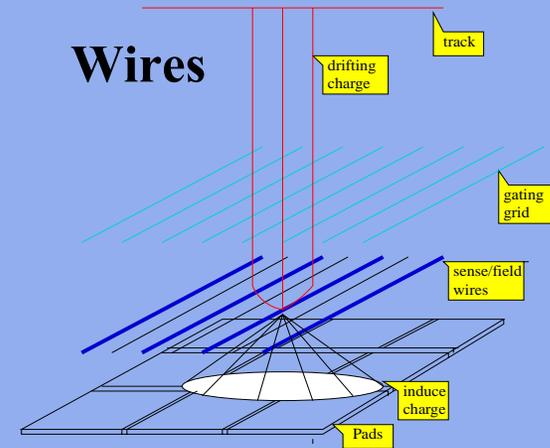


- Principle of MPGD based TPC established
many small scale prototype experiments over the last ≈ 5 years



- cosmics, testbeam
- magnetic field
- under construction for experiments (MICE, T2K)



Example:

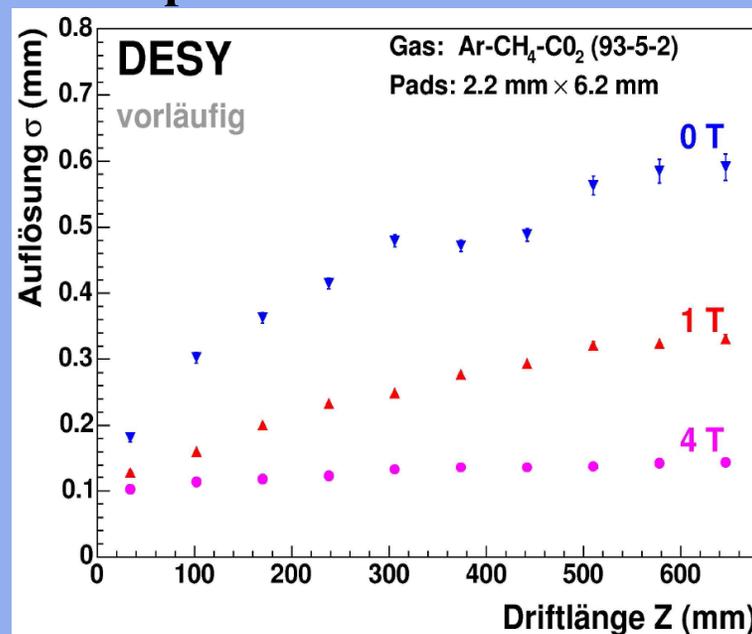

Single point resolution $O(100 \mu\text{m})$
established in

- small scale prototypes
- high magnetic fields


- **Low mass fieldcage**
 - large prototype under construction
 - using composite material

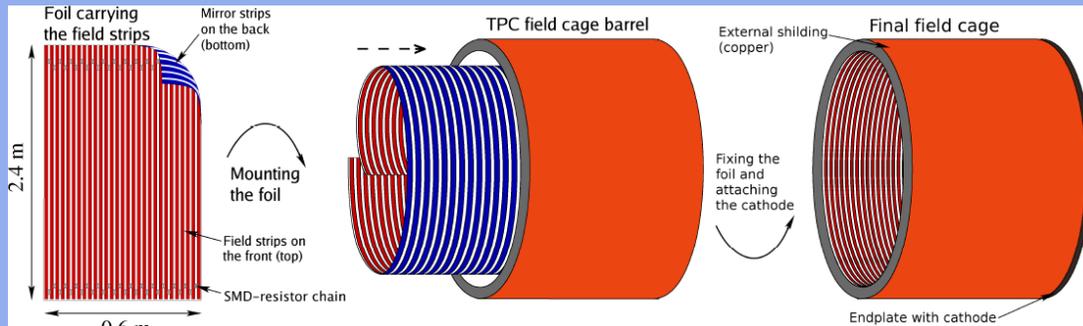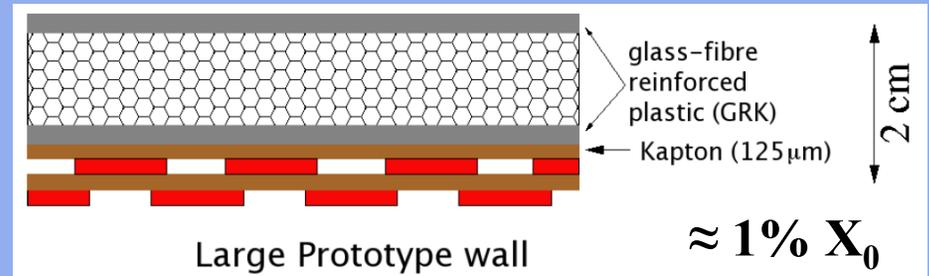

- **Electronics**
 - few 10^6 channels on endplate (ILD)
 - low power to avoid cooling
 - two development paths:
 - FADC based on ALICE ALTRO chip
 - and TDC readout

- **TPC**
 - **200 space points (3-dim) → continuous tracking, pattern recognition**
 - **low mass easy to achieve (barrel)**


- **Silicon tracking**
 - **better single point resolution**
 - **fast detector (bunch identification)**

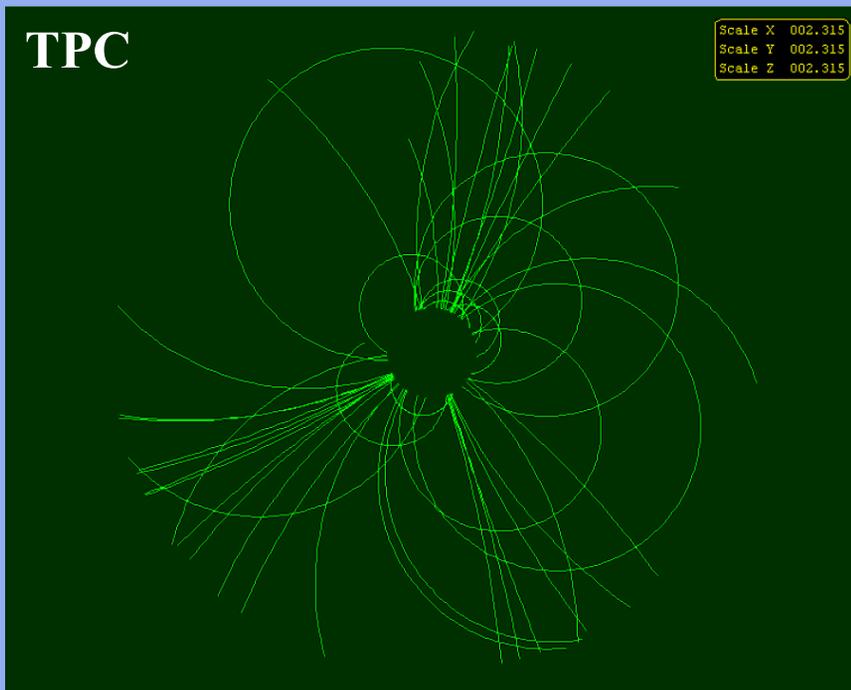

- **Combine MPGD with pixel readout chips**
- **2-d readout with**
 - **Medipix2 0.25 μm CMOS**
 - **256 \times 256 pixel**
 - **55 \times 55 μm^2**




(Micromegas)

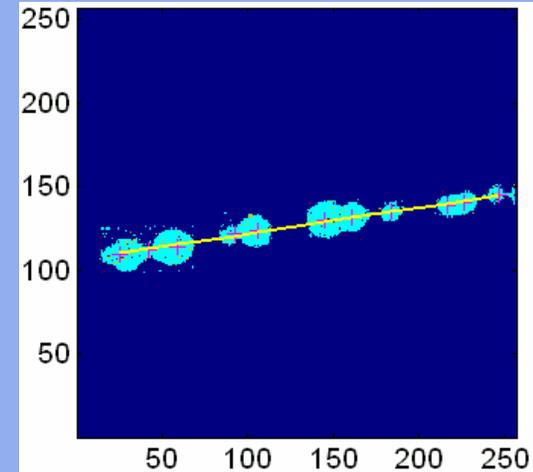


(GEM)

- **Medipix (2-d)**
 - **TimePix (3- d)**
- **50 - 150 MHz clock to all pixel**
- **1st version under test**
- **Will eventually lead to**
 - **TPC diagnostic module**
 - **cluster counting to improve dE/dx**

TimePix layout

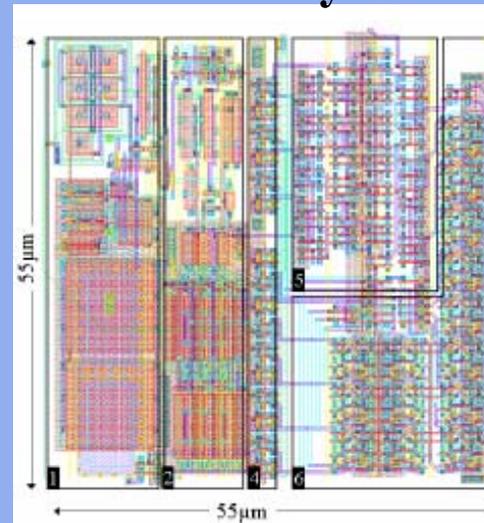

TimePix + μ Megas

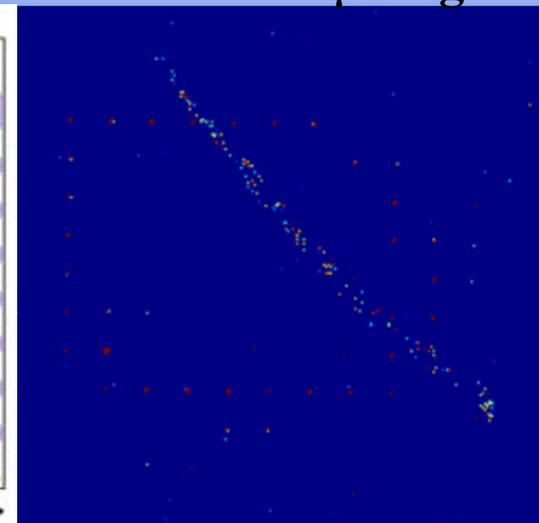

▪ The paradigm of Particle Flow Algorithm (PFA) for optimum jet energy resolution:

- try to reconstruct every particle
- measure charged particles in tracker
- measure photons in ECAL
- measure neutral hadrons in ECAL+HCAL
- use tracker + calorimeters to tell charged from neutral
- average visible energy in a jet
 - ≈ 60% charged particles
 - ≈ 30% photons
 - ≈ 10% neutral hadrons

particles in jet	fraction of energy in jet	detector	single particle resolution	jet energy resolution
charged particles	60 %	tracker	$\frac{\sigma_{pt}}{p_t} \sim 0.01\% \cdot p_t$	negligible
photons	30 %	ECAL	$\frac{\sigma_E}{E} \sim 15\%/\sqrt{E}$	$\sim 5\%/\sqrt{E_{jet}}$
neutral hadrons	10 %	HCAL+ECAL	$\frac{\sigma_E}{E} \sim 45\%/\sqrt{E}$	$\sim 15\%/\sqrt{E_{jet}}$

▪ Jet resolution

$$\sigma = \sigma_{\text{charged}} \oplus \sigma_{\text{photons}} \oplus \sigma_{\text{neutral}} \oplus \sigma_{\text{confusion}}$$



- confusion term arises from misassignment, double counting, overlapping clusters, ...
- minimizing confusion term requires highly granular calorimeter both ECAL and HCAL

- CALICE collaboration (Calorimeter for the Linear Collider Experiment)
 - > 30 institutes from > 10 countries
 - performs R&D effort to validate the concept and design calorimeters for ILC experiments

- GLD, LDC, SID concepts based on PFA calorimeters



- ECAL:
 - SiW calorimeter
 - 23 X_0 depth
 - 0.6 X_0 – 1.2 X_0 long. segmentation
 - 5×5 mm² cells
 - electronics integrated in detector

- Alternative:
 - W + Scintillating strips (GLD)

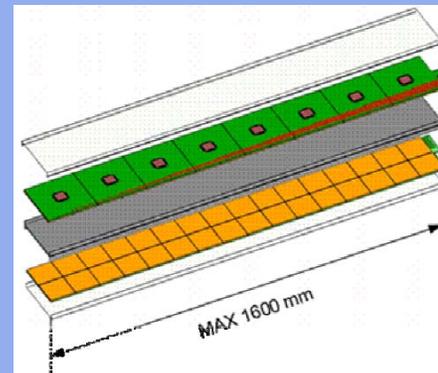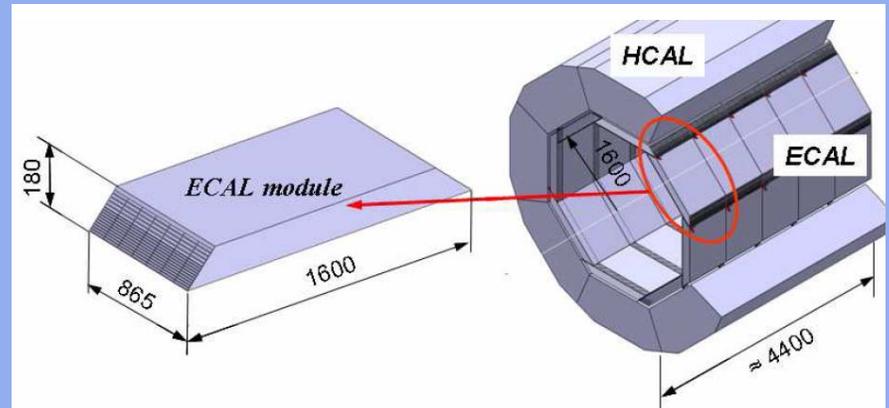

- ECAL slab
- FE ASIC
 - PCB board
 - Si pads


- **HCAL:**
 - 2 options under consideration
- **Analogue Scintillator Tile calorimeter**
 - moderately segmented $3 \times 3 \text{ cm}^2$
 - use SiPM for photo detection
- **Gaseous Digital HCAL**
 - finer segmentation $1 \times 1 \text{ cm}^2$
 - binary cell readout
 - based on RPC, GEM or μ Megas detectors

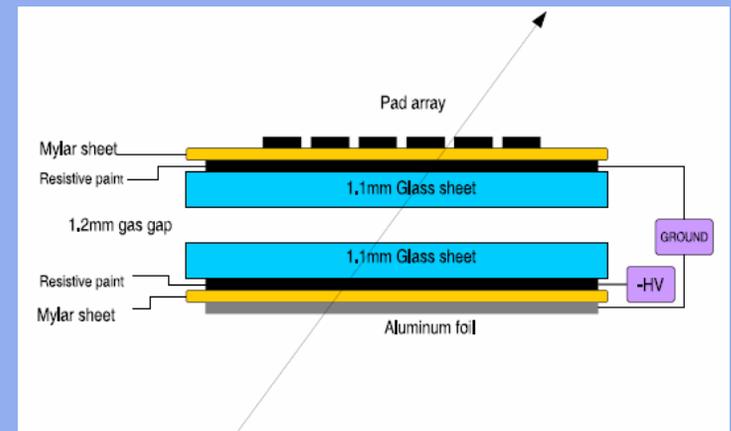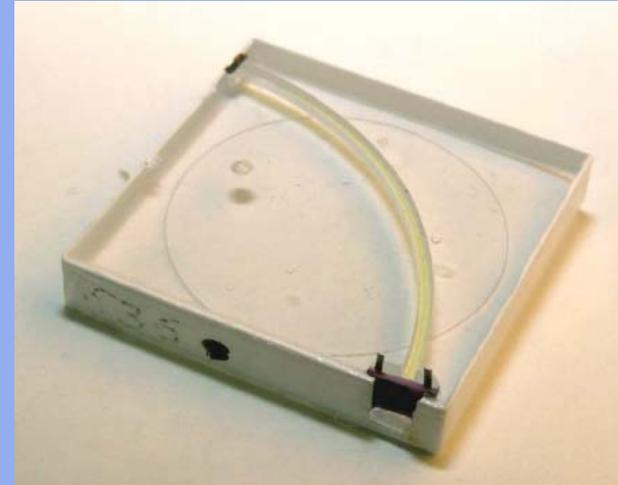

■ CALICE Testbeam at CERN (2006/07)


ECAL $18 \times 18 \text{ cm}^2$

Si cells of $1 \times 1 \text{ cm}^2$
(216 cells per layer)

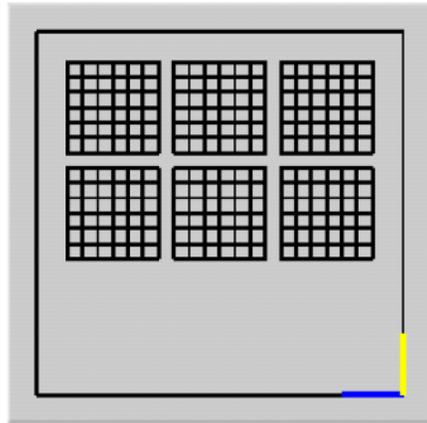


HCAL $100 \times 100 \text{ cm}^2$

scint.tiles of $3 \times 3, 6 \times 6, 12 \times 12 \text{ cm}^2$
(216 tiles per layer)

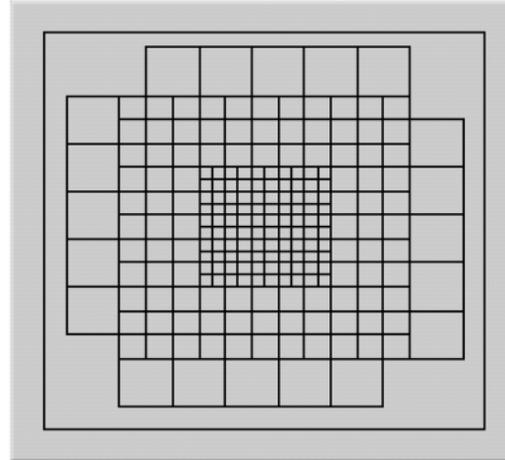


TCMT $100 \times 100 \text{ cm}^2$

scint.strips X or Y of $5 \times 100 \text{ cm}^2$
(20 strips per layer)

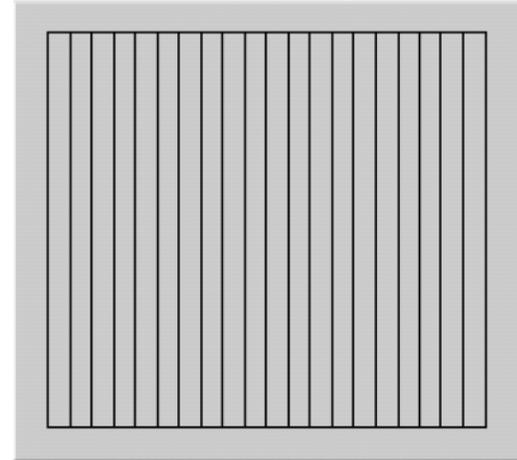

Tail Catcher - Muon Tracker

TCMT

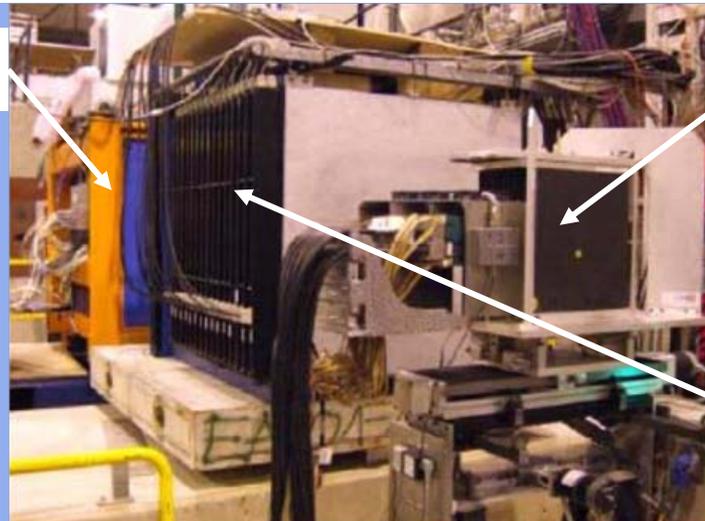


ECAL

HCAL

▪ CALICE Testbeam at CERN (2006/07)

Run 300545:0 Event 5160
 Time: 13:34:59:832:023 Sat Oct 14 2006

ECAL Hits: 32 Energy: 40.0841 mips
 HCAL Hits: 223 Energy: 868.462 mips
 TCMT Hits: 14 Energy: 32.7715 mips


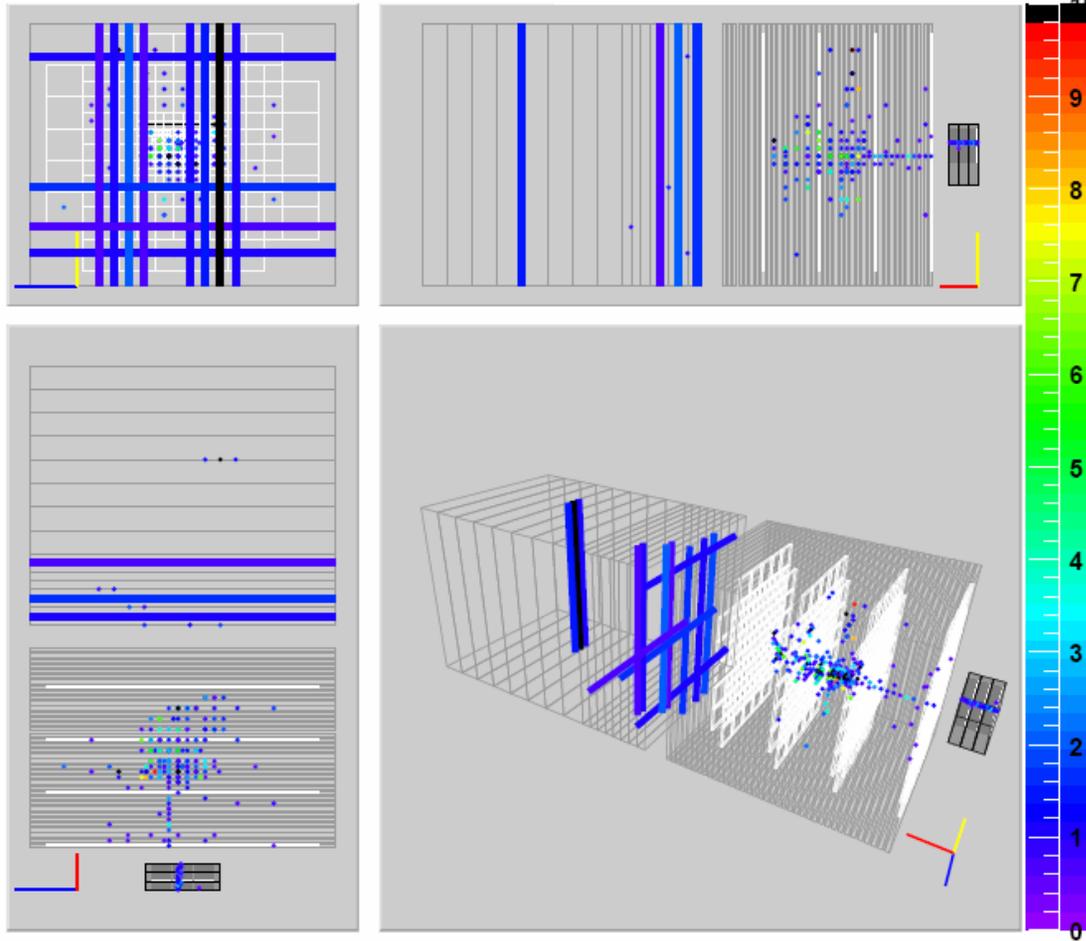


π^- 30 GeV

ECAL threshold = 0.5 mip
 HCAL threshold = 0.5 mip
 TCMT threshold = 0.7 mip

▪ CALICE prototype moved to FNAL, test beam in summer 2008

■ Simulation of an ILC event

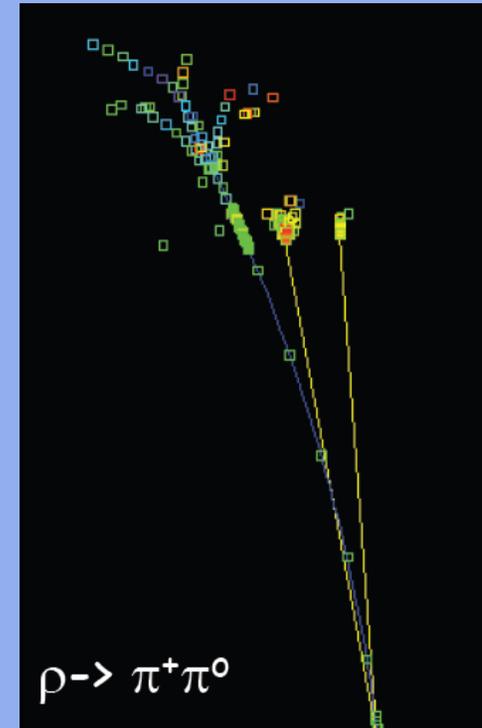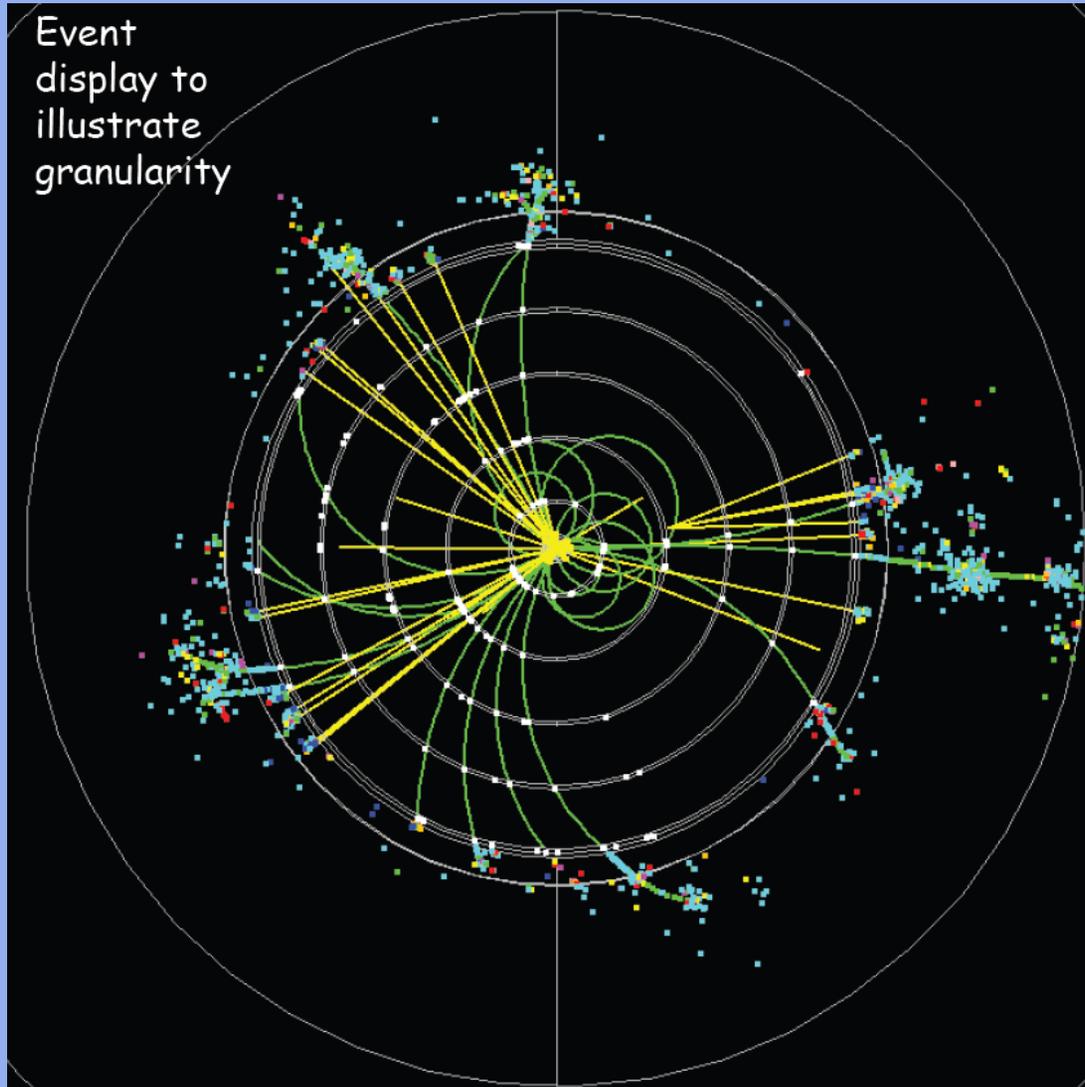


4th concept:

- calorimetry based on dual/triple readout approach
- complementary measurements of showers reduce fluctuations

- Fluctuations of local energy deposits → ▪ Fine spatial sampling with SciFi every 2 mm
- like SPACAL (H1)
- Fluctuations in electromagnetic fraction of shower energy → ▪ clear fibres measure EM component by Cerenkov light of electrons ($E_{th} = 0.25 \text{ MeV}$)
- like HF (CMS)

Dual Readout Module (DREAM) in testbeam at CERN

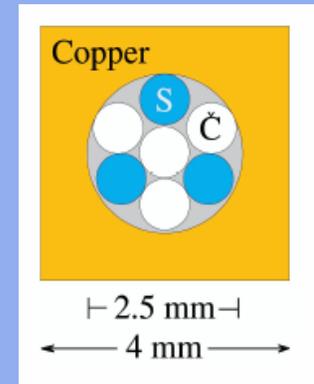

- Binding energy losses from nuclear break-up → ▪ try to measure MeV neutron component of shower (history or Li/B loaded fibres)
- triple readout

- **DREAM testbeam:**
 - **measure each shower twice**


$$(e/h)_C = \eta_C \approx 5$$

$$(e/h)_S = \eta_S \approx 1.4$$




$$C = [f_{em} + (1 - f_{em})/\eta_C]E$$

$$S = [f_{em} + (1 - f_{em})/\eta_S]E$$

$$\rightarrow C/E = 1/\eta_C + f_{em}(1 - 1/\eta_C)$$

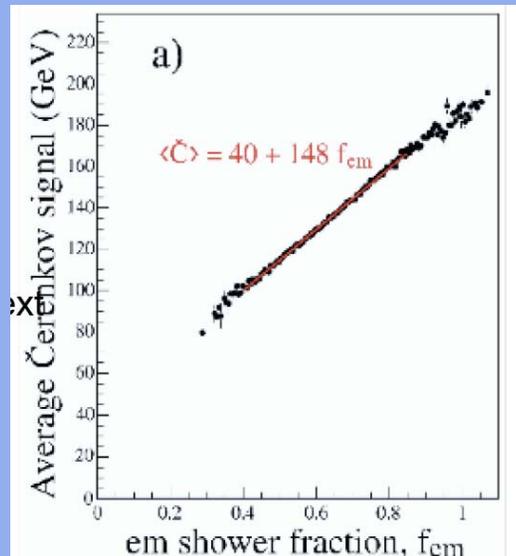


200 GeV π^- beam at CERN

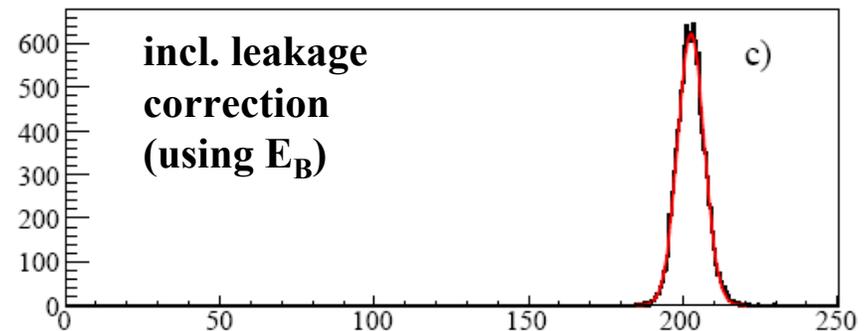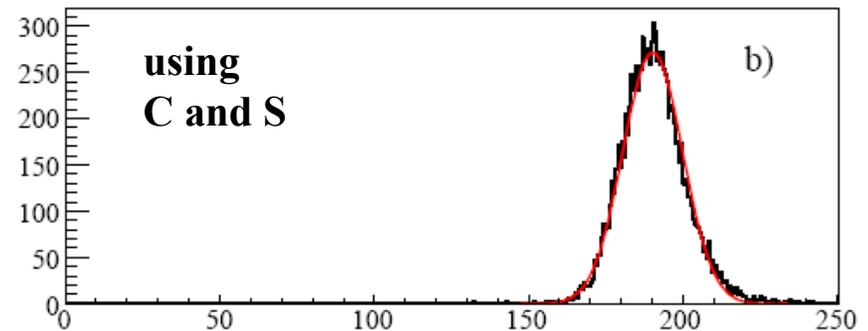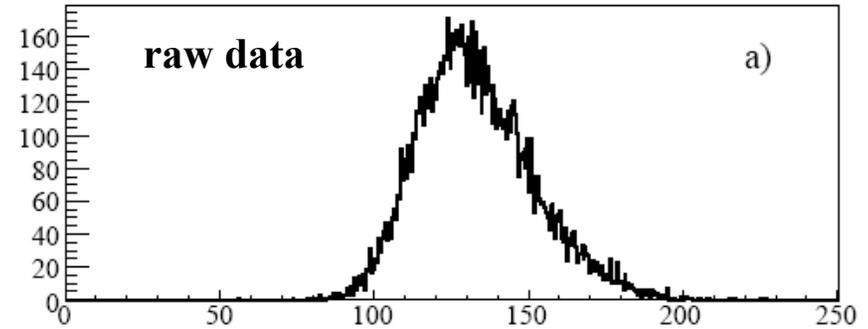

- From DREAM to an ILC calorimeter:

DREAM module

3 scintillating fibers
4 Cerenkov fibers




2.5 mm

4 mm

ILC-type module

2mm W, Pb, or brass plates;
fibers every ~2 mm

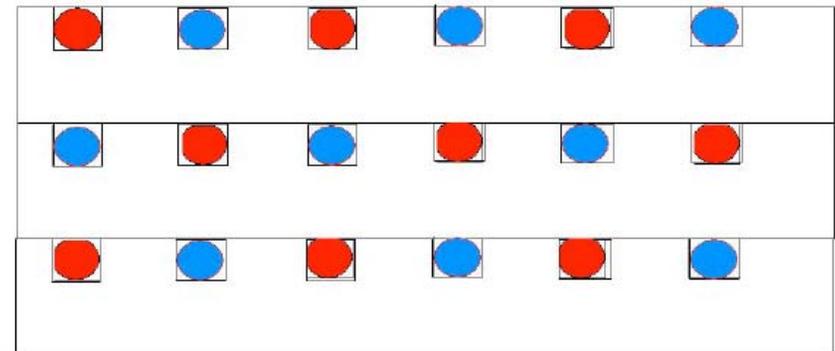


Scint

Cerenkov

Forward Calorimetry

- **Forward calorimeters needed**
 - **LumCal: precise luminosity measurement**
precision $< 10^{-3}$, i.e. comparable to LEP or better
 - **BeamCal: beam diagnostics & luminosity optimisation**

- **Detector technology: tungsten/sensor sandwich**
- **Example: LDC design for zero cross angle**
to be adapted for 14 mrad ILC design

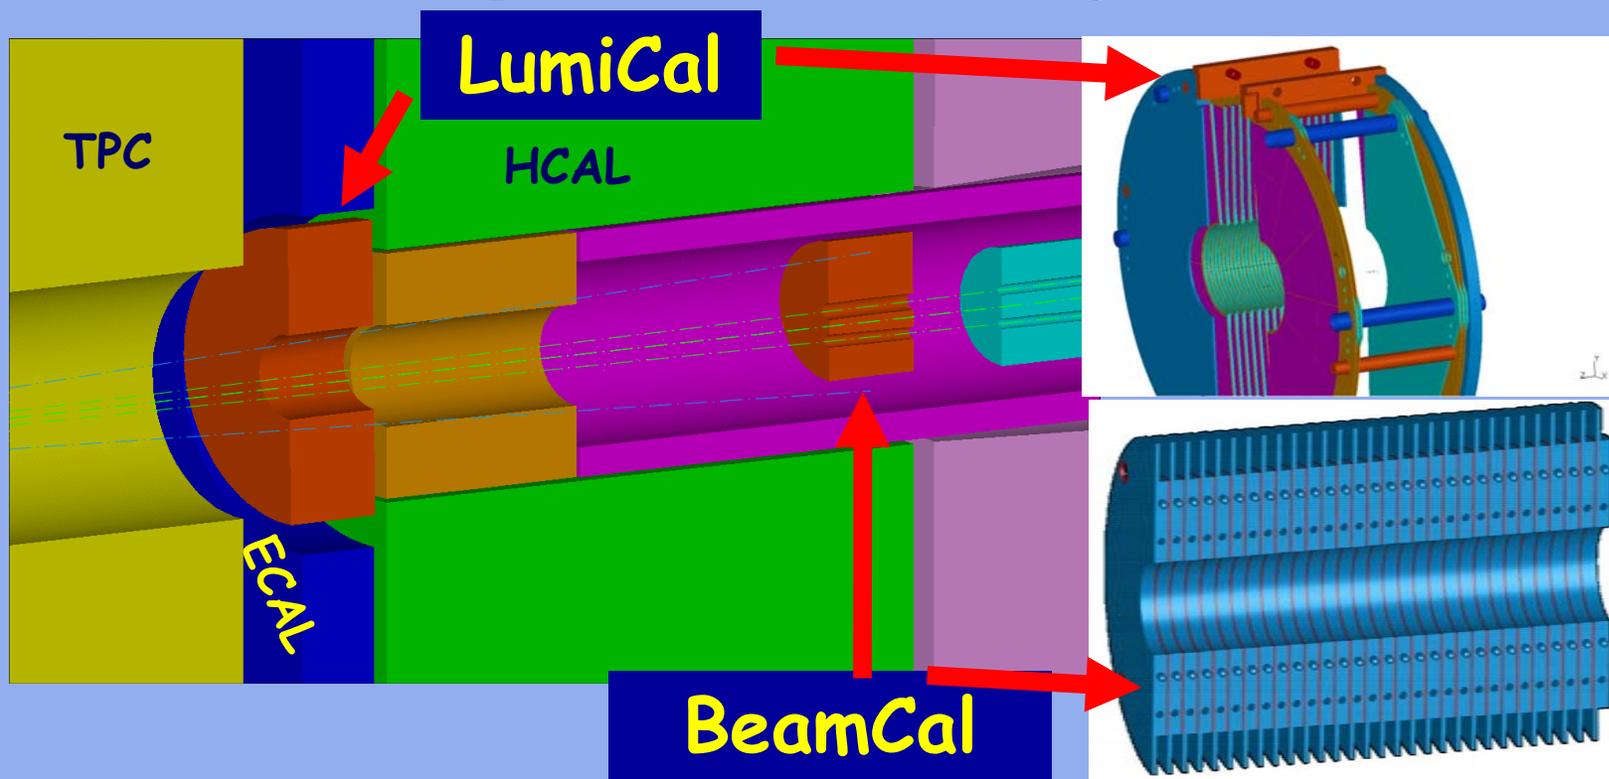


- **Challenges:**
 - ≈ 15000 e^+e^- pairs per BX in MeV range, extending to GeV
 - total deposit $O(10 \text{ TeV})/\text{BX}$
 - ≈ 10 MGy yearly rad. dose


 - identification of single high energy electrons to veto two-photon bkgd.

- **Requires:**
 - rad. hard sensors (diamond)
 - high linearity & dynamic range
 - fast readout (307 ns BX interval)
 - compactness and granularity

Energy deposit per BX:

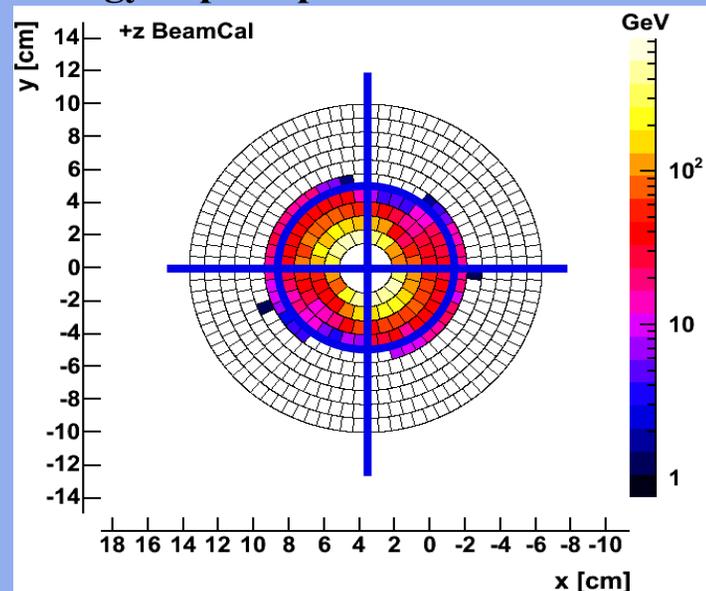


Electron ID efficiency:

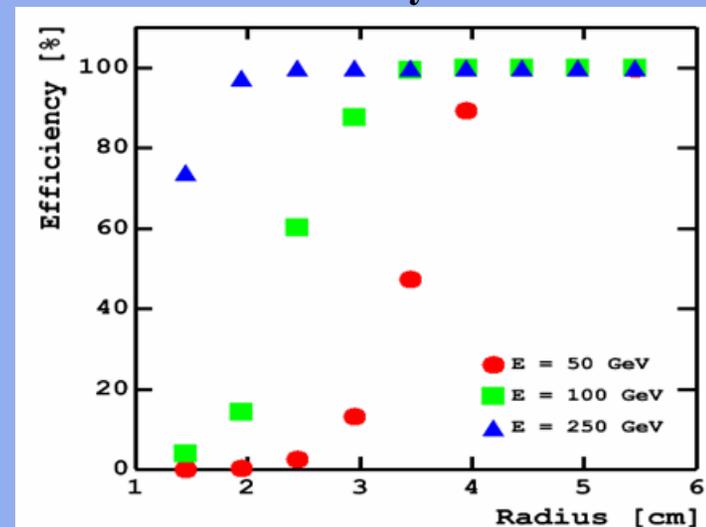


Forward Calorimetry

- Sensors tests at DALINAC (Darmstadt) current 1 – 100 nA ($10 \text{ nA} \approx \text{kGy/h}$)


10 MeV

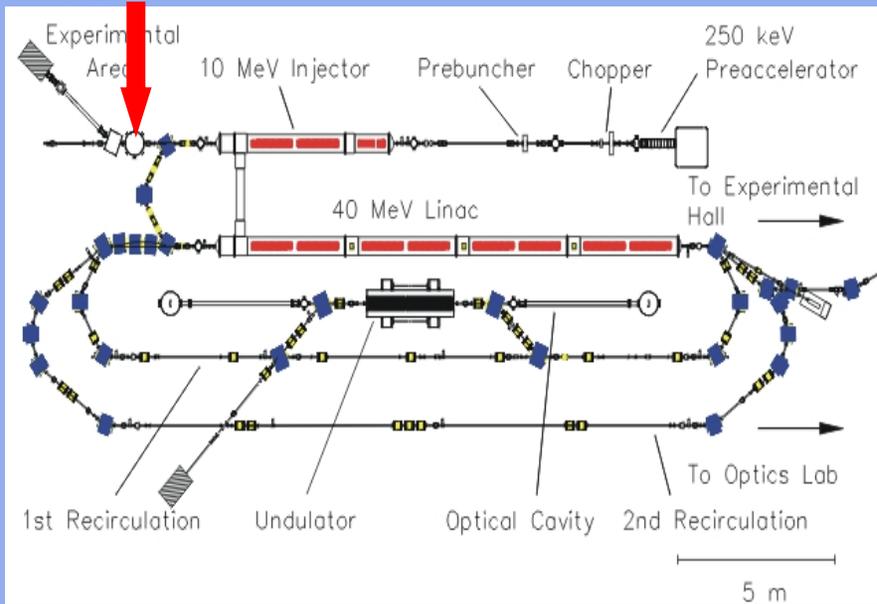



Diamond sensor after $\approx 7 \text{ MGy}$

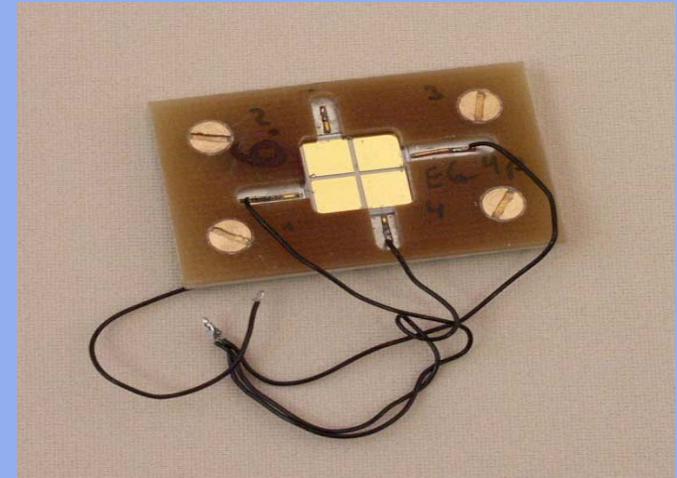

- Alternative sensor materials
 - GaAs
 - SiC
 - radiation hard silicon

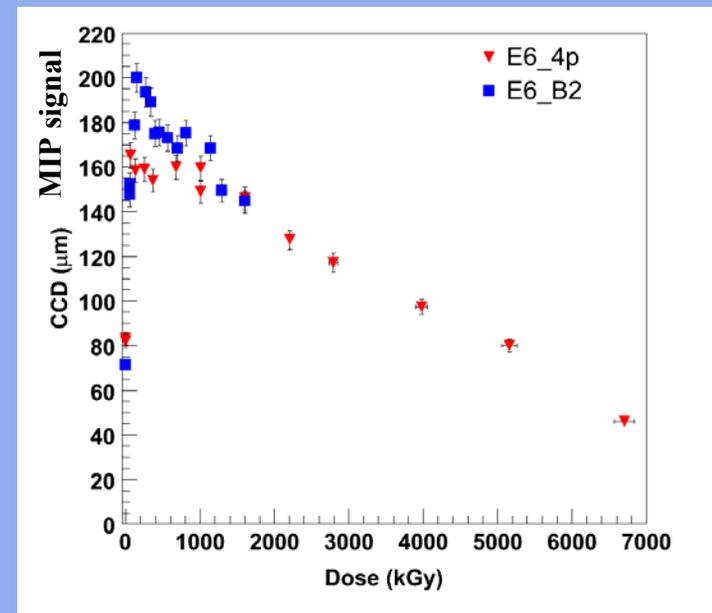

- GLD, LDC & SiD have muon detection only: RPC, scint. fibre detector momentum in central tracker
- 4th concept:
 - muon spectrometer between coils
 - high precision drift tubes

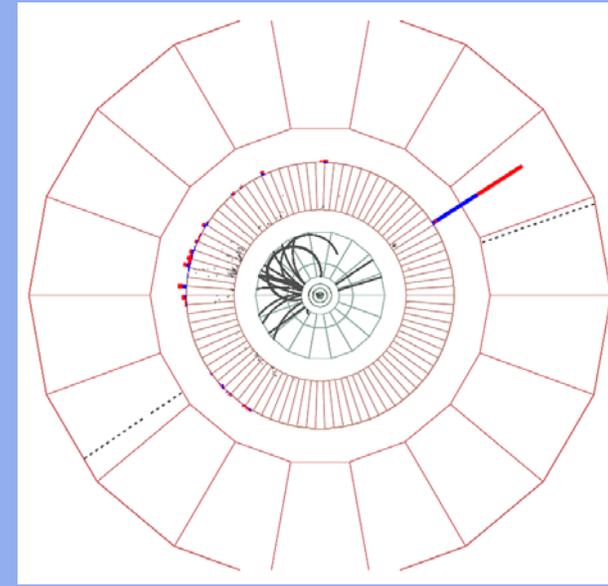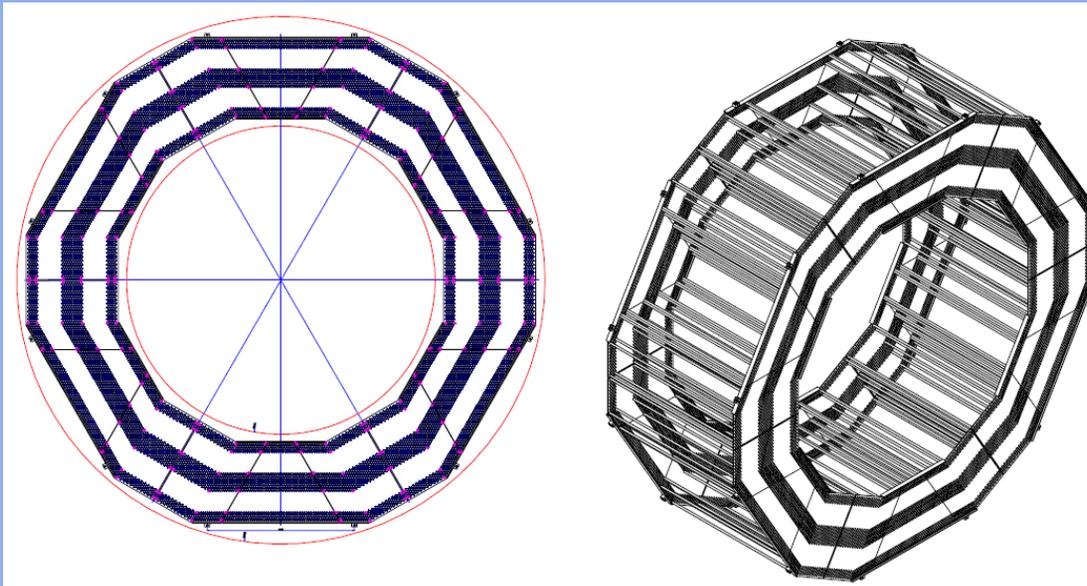


$$H^0 Z^0 \rightarrow W^+ W^- \mu^+ \mu^- \rightarrow jj e^- \bar{\nu}_e \mu^+ \mu^-$$

- low p_T -threshold for muons
- excellent π/μ separation
- also exploiting multiple readout calorimeter

- **Disclaimer:**
 - all in early design phase
 - comparison difficult
 - assume that R&D is succesful and large scale detectors will keep performance

- A few DOD plots on performance from simulation studies


- **4th concept:**
 - muon spectrometer
 - $\sigma(1/p_T) \approx 4 \cdot 10^{-4} / \text{GeV}$

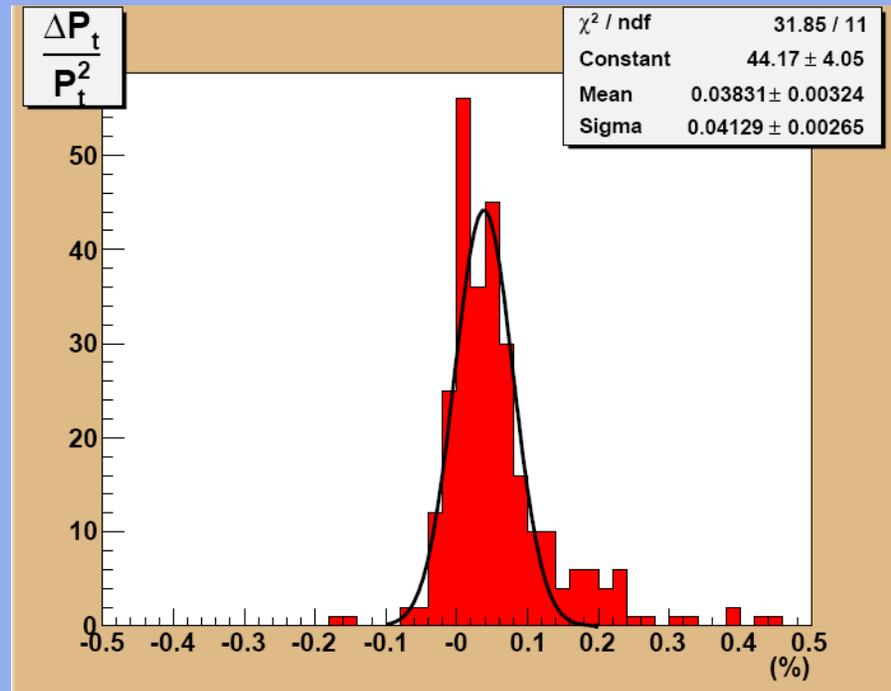

■ SiD Tracking:

143 GeV selectron at 1 TeV
mass measurement from end point


- 0.1% beam energy spread
- 100 MeV error
not limited by tracker

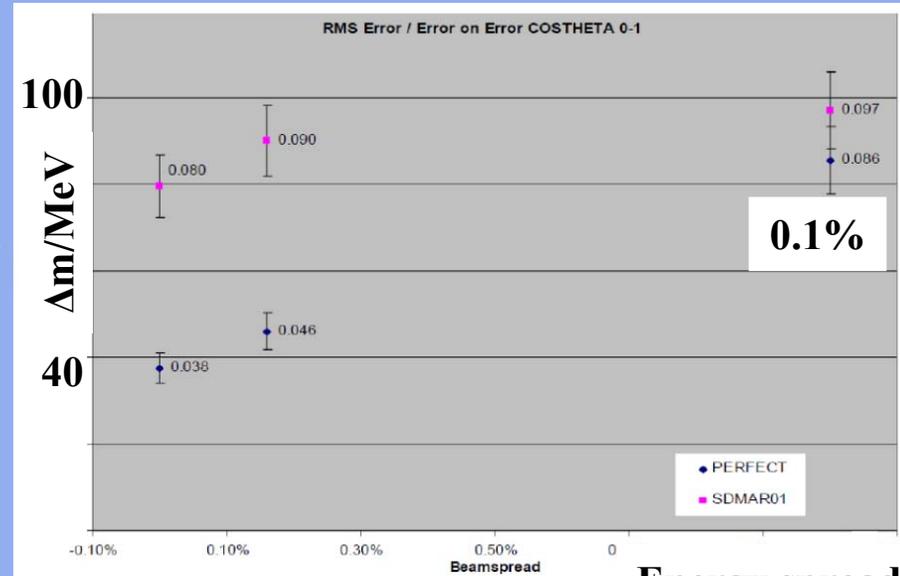

Energy spread

■ GLD calorimetry: test of PFA with Z-pole events Z → hadrons

38% mass resolution
improvements are still possible

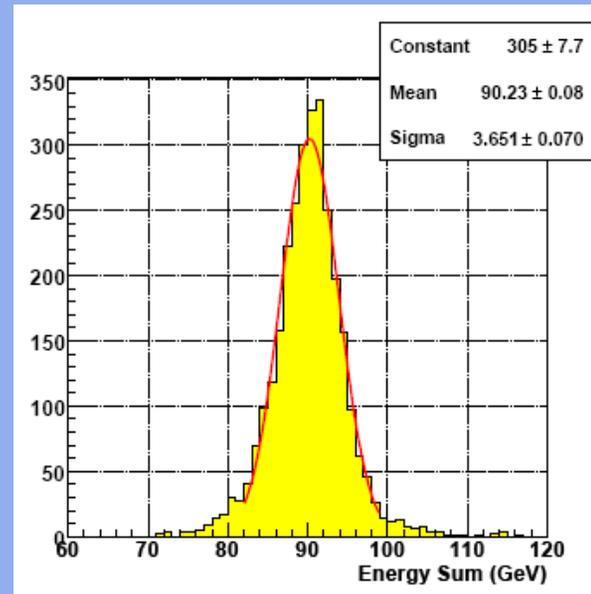




- **Next step:**
from small scale proof-of-principle experiments
to larger scale prototypes
- **Example:**
the EUDET programme in Europe
 - improvements of infrastructures for
larger scale detector prototypes
(not only ILC)
 - devised in close cooperation with the
international R&D collaborations
 - Project started in 2006
for 4 years duration
- **Transnational Access:**
 - support for (European) groups
 - DESY testbeam
 - usage of EUDET infrastructures
- More information at www.eudet.org



European infrastructure projects are based on three pillars:

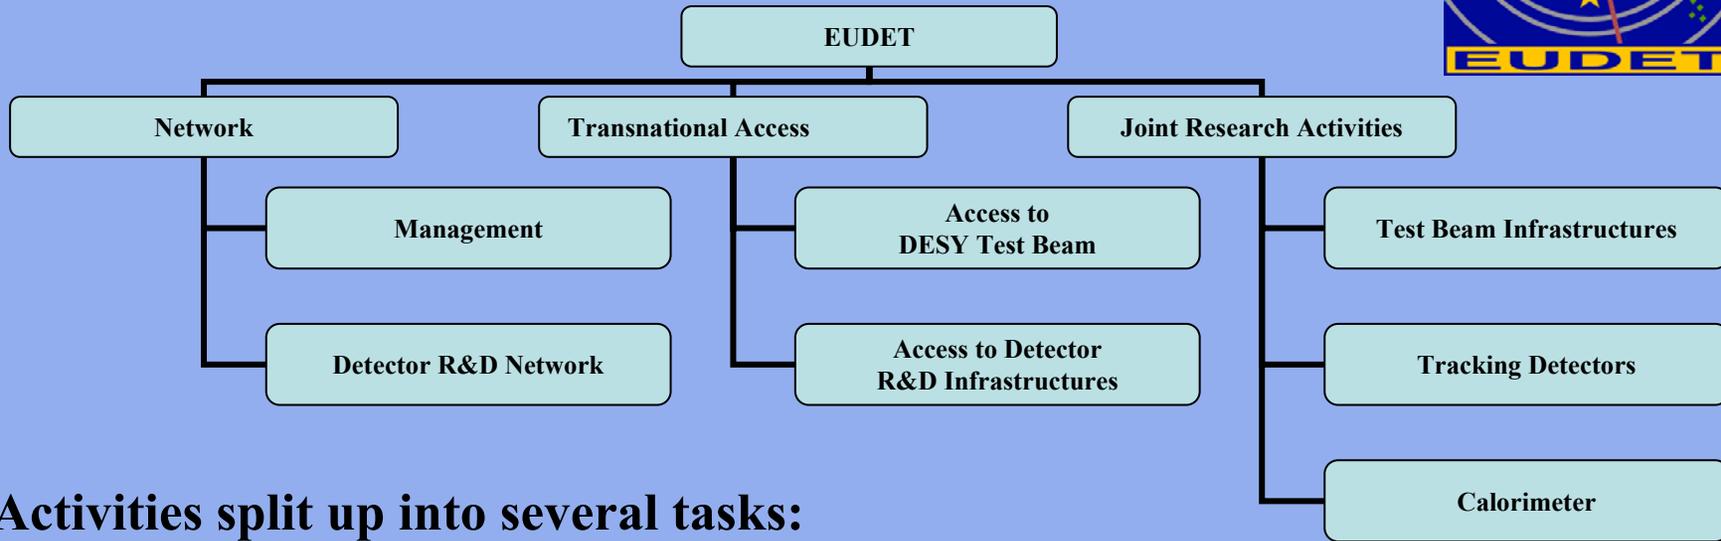

Activities split up into several tasks:

Detector R&D Network:

- Information exchange and intensified collaboration
- Common simulation and analysis framework
- Validation of simulation
- Deep submicron radiation-tolerant electronics

Tracking Detectors:

- Large TPC prototype
- Silicon TPC readout
- Silicon tracking

Test Beam Infrastructure:

- Large bore magnet
- Pixel beam telescope

Calorimeter:



- ECAL
- HCAL
- Very Forward Calorimeter
- FE Electronics and Data Acquisition System

Beam Telescope



- 1st version of pixel beam telescope:
 - analogue readout, reduced speed
 - tested & commissioned at DESY
 - now in CERN testbeam
- 2nd version in preparation
 - digital readout

- Performance:
 - test with DEPFET detectors
 - 3.4 μm resolution (intrinsic + telescope)
 - in good agreement with expected DEPFET resolution (3 μm)

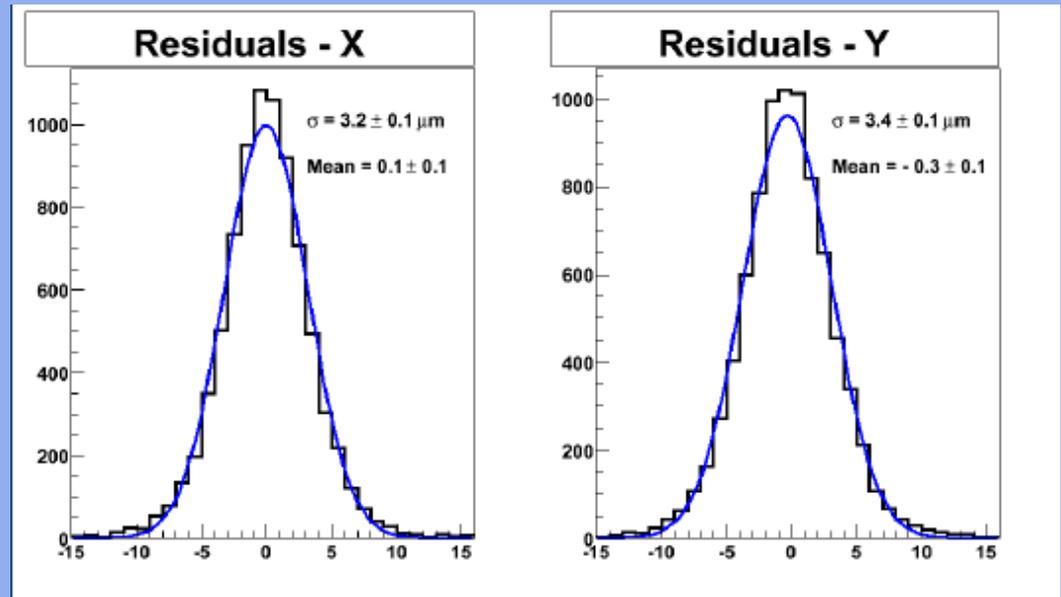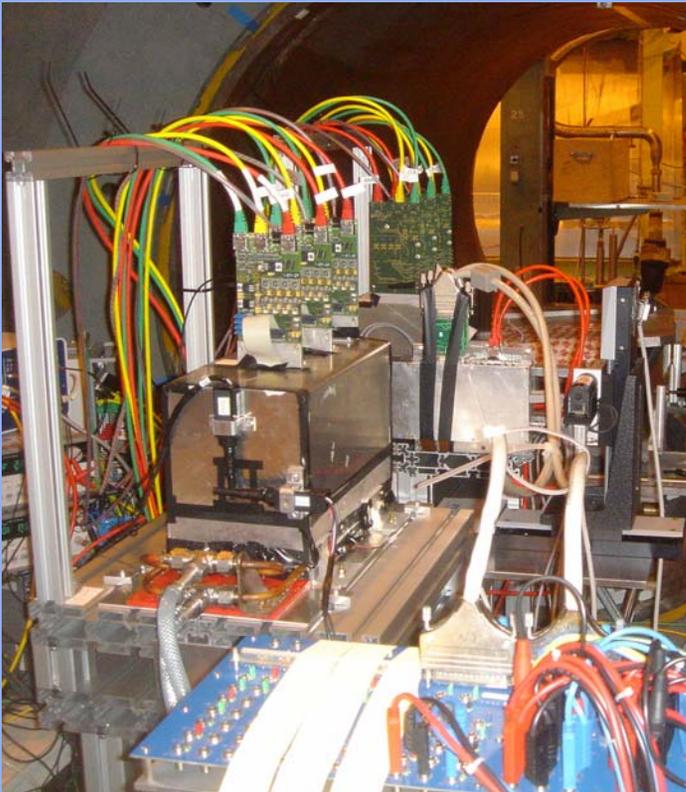




TPC


- Fieldcage design based on light small prototype TPC

- Prototype electronics
 - FADC based on ALTRO
 - TDC type readout


- Well defined interfaces to readout plane
 - mechanics
 - electronics

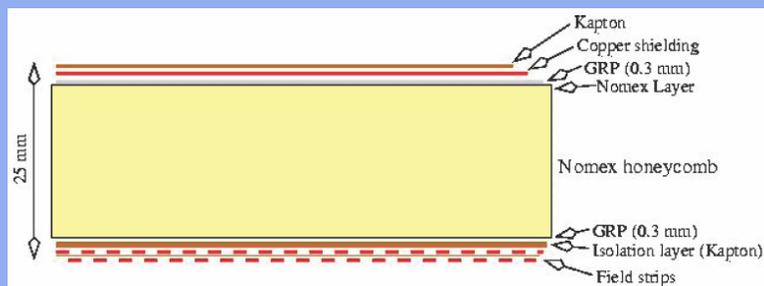


- dimensions:
 - 60 cm length
 - 80 cm diam.

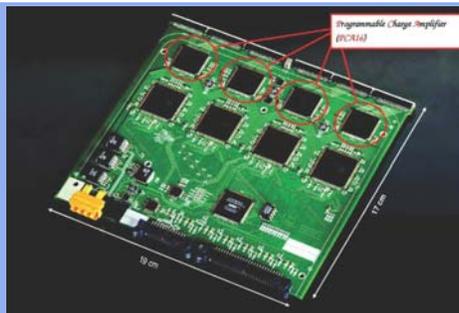

- few 1000 channels under construction

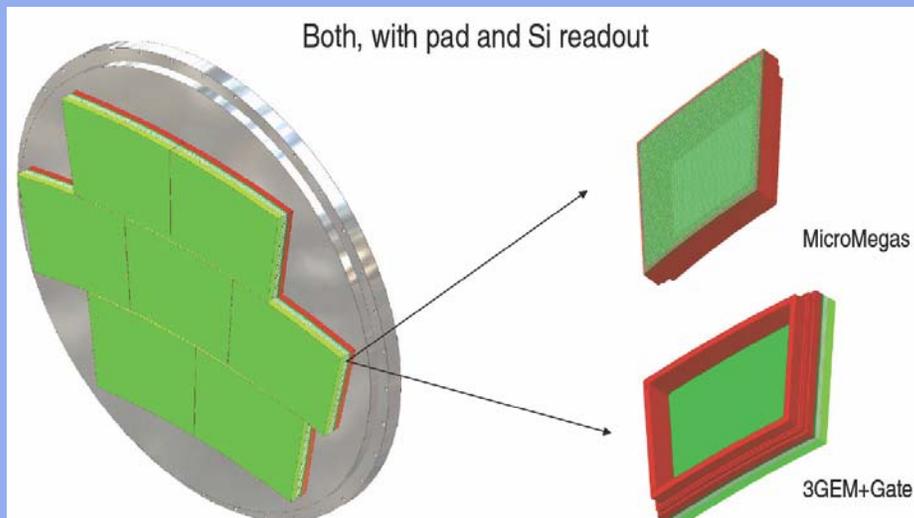


TPC in PCMAG

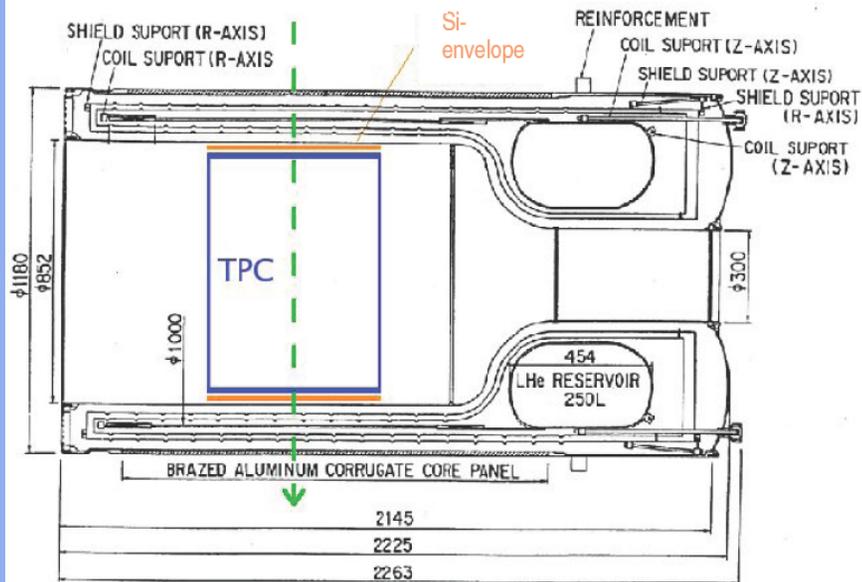



Calorimeter



- Design of the EUDET module
 - ECAL (see right)
 - and HCAL

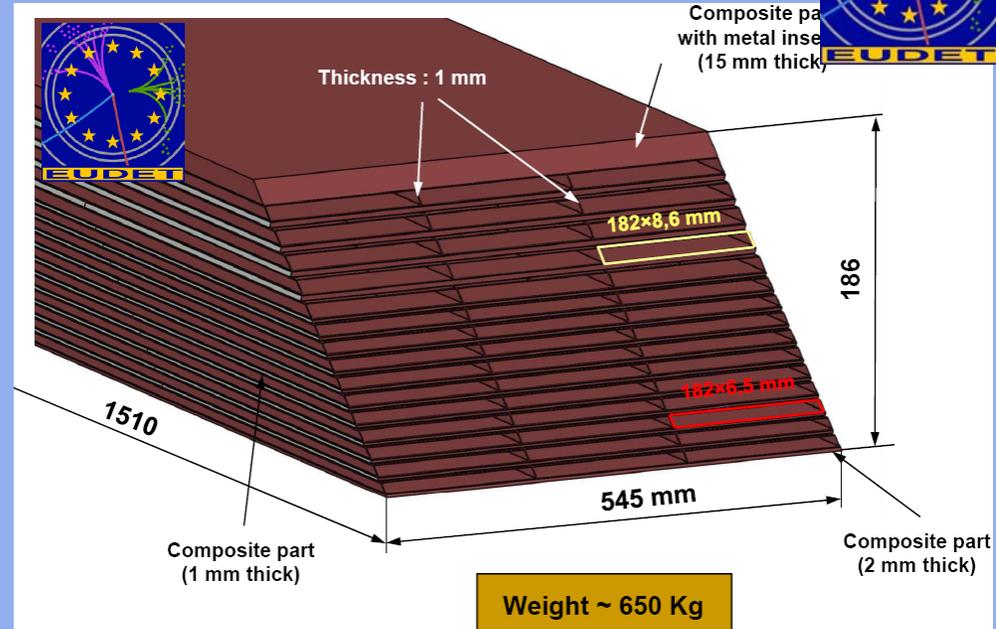

- Design and prototypes of readout ASICs
 - ECAL, DHCAL & AHCAL

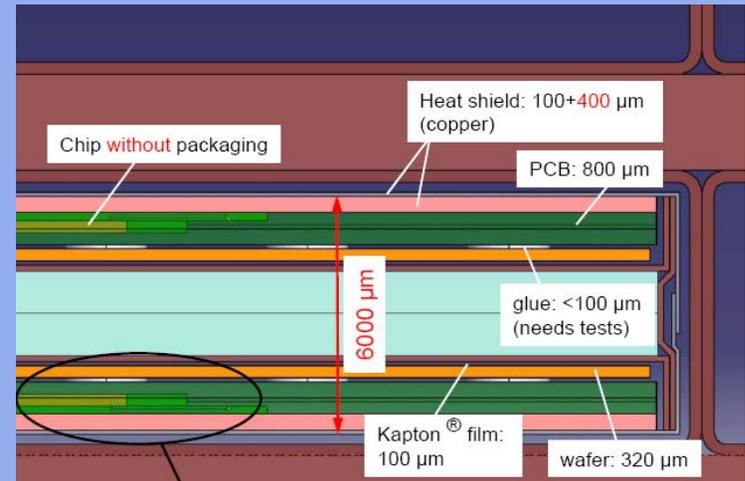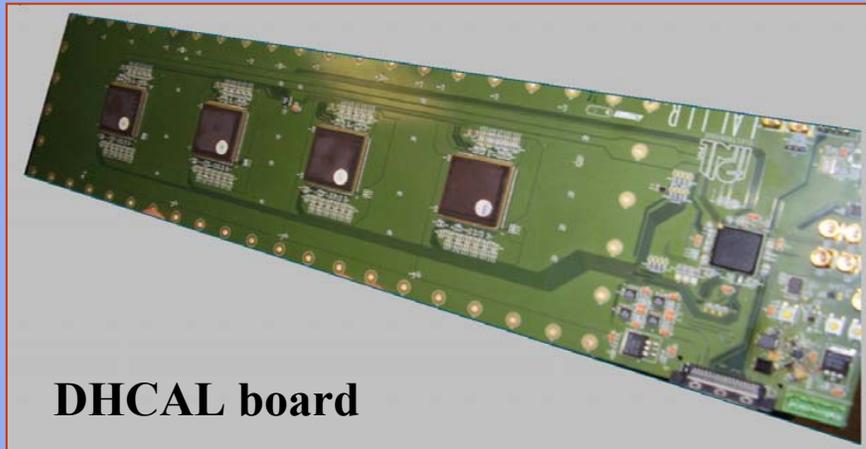

Transnational Access



CERN Courier May 2007:

- Call for applications
 - see advertisement in CERN courier

- EUDET can supply travel funds
 - for DESY testbeam
 - for use of EUDET infrastructures (beam telescope etc.)

- Conditions & requirements:
 - European institute
 - not from country of infrastructure

 - send short scientific proposal to Joachim.Mnich@desy.de

 - + some forms to fill ...



EUDET Detector R&D towards the International Linear Collider

Transnational Access to Detector R&D Infrastructures

EUDET is a project supported by the European Union in the Sixth Framework Programme (FP6) structuring the European Research Area. This project aims at creating a coordinated European effort towards research and development for the next generation of large-scale particle detectors. EUDET comprises 23 European partner institutes and 24 associated institutes working in the field of High Energy Physics.

EUDET provides in the framework of the Transnational Access scheme travel support for groups from the EU and countries associated to FP6 using the following infrastructures:

TA1: Experiments at DESY testbeam (<http://testbeam.desy.de>)
TA2: Experiment using infrastructure developed in the EUDET project: high precision beam telescope; large, low mass TPC field cage; silicon based TPC readout system; infrastructure for development of SI-Stripdetectors; infrastructures for development of granular calorimeters.

TO APPLY FOR EC FUNDED ACCESS

visit our web site <http://www.eudet.org> to get more information about the modalities of application.

EUDET Summary



- **EUDET is an EU funded infrastructure programme for detector R&D**
 - **well defined programme**
 - **embedded in international detector R&D collaborations such as CALICE, LCTPC etc.**

- **Provides additional funds for European institutes**
 - **to help in the next phase of ILC detector R&D from small to larger prototypes**


- **Even more important**
 - **EUDET fertilises collaboration between institutes („community building“)**
 - **EUDET can help to raise additional funds at national agencies**

- **Can provide some support for other European groups**
 - **Transnational Access**

- **EUDET is now at mid-term**
 - **project is on track with major milestones achieved**
 - **more exciting work ahead of us**
 - **still open for contributions from new interested groups**

More information at www.eudet.org

- **ILC: 500 → 1000 GeV Linear Collider**
next large collider project
- **Requires detectors with unprecedented performances**
 - challenges different than at the LHC
- **4 (now 3) detector concepts under development**
- **R&D on detector technologies**
 - candidate technologies
 - identified & verified in small scale experiments
- **Many questions still to be answered**
- **Next steps:**
 - engineering designs for machine and detectors
 - detector R&D move to larger scale prototypes
 - requires intensified international collaboration
- **Need to increase efforts to have ILC and two detectors ready next decade**

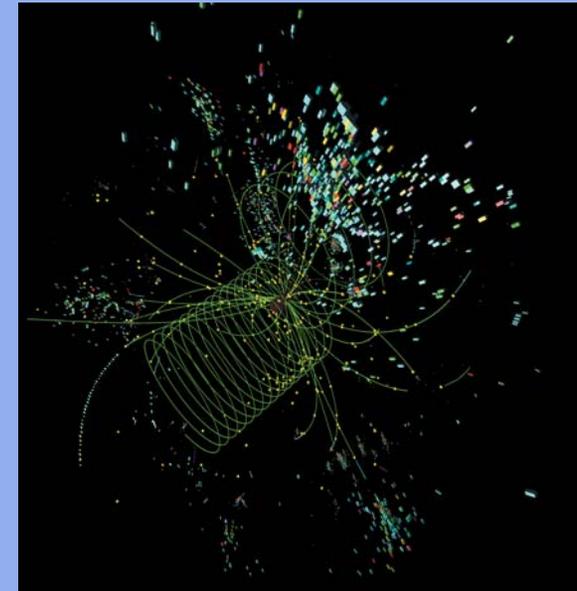

Simulated $ee \rightarrow ZZ$